



Switches & Pilot Lights

Finger safe (IP20) screw terminals type



ø22 HW Series screw terminals Switches & Pilot Lights

- Up to four contacts (in two tiers) can be mounted on each unit.
- Gold-plated contacts are available upon request. (Contact material: silver with gold plating)
- Locking lever removable contact blocks
- Finger-safe IP20 contacts
- Tamperproof construction
- All E-stops meet EN60947-5-5, and are compliant with SEMI S2 standards
- Worldwide approvals
- Easy to assemble
- Choice of black plastic or metallic front bezels
- LED illumination
- Slow make double break contacts



• See website for details on approvals and standards.

Specifications and Ratings

Contact Ratings

Pushbuttons, Illuminated Pushbuttons, Dual Pushbuttons, Selector Switches, Key Selector Switches, Illuminated Selector Switches, Selector Pushbuttons, Monolever Switches, Emergency Stop Switches	Contact Block	Type HW-U
	Rated insulation voltage	600V
	Rated continuous current	10A
	Contact ratings by utilization category IEC 60947-5-1	AC-15 (A600), DC-13

• See website for approved contact ratings.

Rated Operating Voltage and Current by Utilization Category

HW-U10-F (NO contact), HW-U01-F (NC contact)


Operating Voltage			24V	48V	50V	110V	220V	440V
Operating Current	AC 50/60 Hz	AC-12 Control of resistive loads and solid state loads	10A	-	10A	10A	6A	2A
		AC-15 Control of electromagnetic loads (> 72 VA)	10A	-	7A	5A	3A	1A
	DC	DC-12 Control of resistive loads and solid state loads	10A	5A	-	2.2A	1.1A	-
		DC-13 Control of electromagnets	5A	2A	-	1.1A	0.6A	-

HW-U10R-F (early make / NO contact), HW-U01R-F (late break / NC contact)

Operating Voltage			24V	48V	50V	110V	220V	440V
Operating Current	AC 50/60 Hz	AC-12 Control of resistive loads and solid state loads	5A	-	5A	5A	3A	1A
		AC-15 Control of electromagnetic loads (> 72 VA)	5A	-	3.5A	2.5A	1.5A	0.5A
	DC	DC-12 Control of resistive loads and solid state loads	5A	2.5A	-	1.1A	0.55A	-
		DC-13 Control of electromagnets	2.5A	1A	-	0.55A	0.3A	-

- The operating current represents making and breaking currents (IEC 60947-5-1).
- Minimum applicable load: 3V AC/DC, 5 mA (applicable range may vary with operating conditions)
- Contact materials: Silver contacts

Contact Block (HW-U)

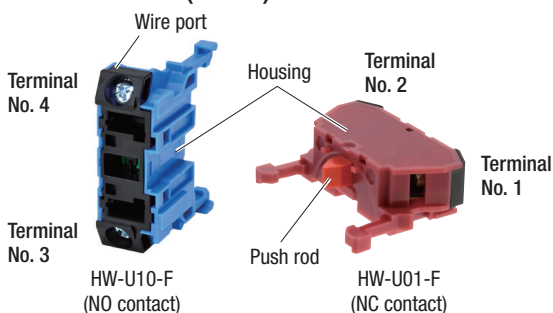

	NO	NC	NO-EM (early make)	NC-LB (late break)
Part No.	HW-U10-F	HW-U01-F	HW-U10R-F	HW-U01R-F
Shape				
Housing	Blue	Purple red	Blue	Purple red
Push Rod	Green	Red	Black	White
Weight	11g			

- Up to four contacts (in two tiers) can be mounted on each unit.
- Gold-plated contacts are available upon request. (Contact material: silver with gold plating)

LED Illuminated Part Specifications

Illuminated Pushbuttons, Illuminated Selector Switches,
Dual Pushbuttons (with pilot light)

Rated Voltage	Operating Voltage	LED Lamp	
		Ramp Base	Part No.
6V AC/DC	6V AC/DC	±10%	LSRD-6
12V AC/DC	12V AC/DC		LSRD-1
24V AC/DC	24V AC/DC		LSRD-2
100/120V AC/DC	100/120V AC/DC		LSRD-H2
200/220V AC	200/220V AC		LSRD-M2
230/240V AC	230/240V AC		LSRD-M4
	207 to 250V		

Pilot Light

Rated Voltage	Operating Voltage	LED Lamp	
		Ramp Base	Part No.
6V AC/DC	6V AC/DC	±10%	LSRD-6
12V AC/DC	12V AC/DC		LSRD-1
24V AC/DC	24V AC/DC		LSRD-2
100/120V AC/DC	100/120V AC/DC		LSRD-H2
200/220V AC	200/220V AC		LSRD-M2
230/240V AC	230/240V AC		LSRD-M4
380V AC	380V AC	±10%	LSRD-6
400/440V AC	400/440V AC		
480V AC	480V AC		

Types and Shapes of Illuminated Units

Typical Applications	Illuminated Switch Unit		Pilot Light	
Type	Full Voltage Adapter		Pilot Lights (Assembled)	Transformer Units
Rated Voltage	6V AC/DC, 12V AC/DC, 24V AC/DC, 100 to 120V AC/DC, 200 to 240V AC		6V AC/DC, 12V AC/DC, 24V AC/DC, 100 to 120V AC/DC, 200 to 240V AC	380 to 480V AC
Shape				

LED Lamp Ratings

LSRD lamp

Part No.	LSRD-6	LSRD-1	LSRD-2	LSRD-H2	LSRD-M2	LSRD-M4
Ramp Base	BA9S/13					
Rated Voltage	6V AC/DC	12V AC/DC	24V AC/DC	100/120V AC/DC	200/220V AC	230/240V AC
Voltage Range	6V AC/DC ±10%	12V AC/DC ±10%	24V AC/DC ±10%	100/120V AC/DC ±10%	200/220V AC ±10%	207~250V
Current Draw	DC	10mA	7mA	7mA	2mA	—
	AC	14mA	8mA	8mA	2mA	2mA
Life (reference value)	Approx. 100,000 hours (The luminance is reduced to 50% the initial intensity when used on complete DC at 25°C.)					
Internal Circuit	X1 X2 Limited current circuit Noise protection circuit Rectifier circuit Dimmer protection circuit 					

LSTDB, LSRD-2: Large type (Dome, HW1P-5Q4*) for pilot light only

Part No.	HW1P-5Q4R		HW1P-5Q4A	HW1P-5Q4G	HW1P-5Q4Y	HW1P-5Q4S	HW1P-5Q4PW
Illumination color	R (Red)		A (Amber)	G (Green)	Y (Yellow)	S (Blue)	PW (Pure white)
Built-in LED bulb part No.	LSTDB-2AN			LSTDB-2GN	LSRD-2		
Lamp Base	BA9S/13						
Rated Voltage	24V AC/DC						
Voltage Range	24V AC/DC±10%						
Current Draw	DC	14mA		8mA	7mA		
	AC						
Life (reference value)	Approx. 20,000 hours (The luminance is reduced to 50% the initial intensity when used on complete DC at 25°C.)				Approx. 100,000 hours (The luminance is reduced to 50% the initial intensity when used on complete DC at 25°C.)		
Internal Circuit	X1 X2 Limited current circuit Noise protection circuit Rectifier circuit Dimmer protection circuit  				X1 X2 Limited current circuit Noise protection circuit Rectifier circuit Dimmer protection circuit  		

Since the LSRD bulb is available in a single color, there is no need to specify the color in the Part No.

Degree of Protection

IEC60529

Unit	IEC 60529
All models except dual pushbuttons	IP65 (*1)
Dual pushbuttons	IP40 (*2)

*1) When using a nameplate with the HW series, IP65 protection degree is achieved only when nameplates shown on page 34 are used.
(IP40 when other ø22 nameplates such as NWA are used)

*2) IP65 when used with button covers (HW9Z-D7D).

UL50

Unit	UL50
All models except illuminated selector switches	Type 4X (*3)(*4)

*3) When using a nameplate with the HW series, IP65 protection degree is achieved only when nameplates shown on page 34 are used.

*4) For dual pushbuttons, Type 4X is achieved when used with button covers (HW9Z-D7D).

Specifications

Switches (except for emergency stop switch)

Operating Temperature	–25 to +60°C (no freezing) Illuminated unit: –25 to +50°C
Operating Humidity	30 to 85% RH (no condensation)
Storage Temperature	–40 to +80°C (no freezing)
Contact Resistance	50 mΩ maximum (initial value)
Insulation Resistance	100 MΩ minimum (500V DC megger)
Overvoltage Category	II
Impulse Withstand Voltage	4.0kV Illuminated unit: 2.5kV
Pollution Degree	3 (IEC60947-5-1)
Dielectric Strength	Between live and dead parts: 2500V AC, 1 minute (*1)
Vibration Resistance	Damage limits: 30 Hz, amplitude 1.5 mm Operating extremes: 5 to 55Hz, amplitude 0.5 mm
Shock Resistance	Damage limits: 1,000 m/s ² Operating extremes: 100 m/s ²
Degree of Protection	Terminal: Finger-safe (IP20) structure Panel front: IP65 (IEC 60529), UL Type 4X
Recommended Tightening Torque for Locking Ring	2.0N·m
Terminal Style	Screw terminal
Mechanical Life (minimum operations)	Pushbuttons, Illuminated Pushbuttons Momentary 5,000,000 Maintained 500,000 Dual pushbuttons 500,000 Selector switches 500,000 Key selector switches (Disc tumbler) 500,000 Key selector switches (Pin tumbler) 100,000 Illuminated selector switches 500,000 Selector pushbuttons 250,000 Monolever switches 250,000
Electrical Life (*5)	Pushbuttons, Illuminated Pushbuttons Momentary 500,000 (*2) Maintained 500,000 (*4) Dual pushbuttons 500,000 (*2) Selector switches 500,000 (*3) Key selector switches (Disc tumbler) 500,000 (*3) Key selector switches (Pin tumbler) 100,000 (*3) Illuminated selector switches 500,000 (*3) Selector pushbuttons 250,000 (*3) Monolever switches 250,000 (*4)
Weight (approx.)	66g (HW1B-M122), 84g (HW1L-M122Q4) 66g (HW1S-2T22), 94g (HW1K-2A22) 72g (HW1K-2JPC11), 84g (HW1F-222Q4) 71g (HW1R-2A22), 82g (HW1M-2222-22N9) 72g (HW7D-B111111), 90g (HW7D-L111111Q4)

*1) Full-voltage illuminated unit for 2-position pushbutton switch: AC 1000V, 1 minute (between live parts and grounded metal parts)

*2) Switching frequency 1,800 operations/h, duty ratio 40%

*3) Switching frequency 1,200 operations/h, duty ratio 40%

*4) Switching frequency 900 operations/h, duty ratio 40%

*5) Load condition 220V AC, 3A (AC-15)


Pilot lights

Operating Temperature	–25 to +50°C (no freezing)
Operating Humidity	30 to 85% RH (no condensation)
Storage Temperature	–40 to +80°C (no freezing)
Insulation Resistance	100 MΩ minimum (500V DC megger)
Overvoltage Category	II
Impulse Withstand Voltage	2.5kV
Pollution Degree	3
Dielectric Strength	Between live and dead parts: 2000V AC, 1 minute
Vibration Resistance	Damage limits: 30 Hz, amplitude 1.5 mm Operating extremes: 5 to 55Hz, amplitude 0.5 mm
Shock Resistance	Damage limits: 1,000 m/s ² Operating extremes: 100 m/s ²
Degree of Protection	Terminal: Finger-safe (IP20) structure Panel front: IP65 (IEC 60529), UL Type 4X
Recommended Tightening Torque for Locking Ring	2.0N·m
Terminal Style	Screw terminal
Weight (approx.)	20g (HW1P-1Q4)

Mounting Hole Layout

Dimensions in mm.

Panel Cut (IEC60947-5-1)



- When high temperature is expected, take necessary measures such as securing sufficient mounting centers or using a cooling fan.

- The 3.2 mm recess is for preventing rotation and is not necessary when the nameplate or anti-rotation ring is not used.

Minimum Mounting Centers

Dimensions in mm.

Unit	Vertical (*6)	Horizontal (*7)
ø40mm mushroom buttons	50	40
Selector pushbuttons	50	50
Monolever switches	72	72
Pilot lights	50	30
Dual pushbuttons	55	30
Illuminated selector switches	50	50

- For emergency stop switch mounting centers, see page 23.

- Determine the mounting centers in consideration of the operation, wiring, and testing terminals.

Ordering Information

Emergency stop switch specifications: see page 23

ø22 HW Series

Assembled Products




ø22 HW Series Assembled Products

Pushbuttons


Quantity: 1

Name / Shape	Operation	Contact Configuration	Part No.
	Momentary	1NO	HW①B-M1F10-④
		1NC	HW①B-M1F01-④
		1NO-1NC	HW①B-M1F11-④
		2NO	HW①B-M1F20-④
		2NC	HW①B-M1F02-④
	Maintained	2NO-2NC	HW①B-M1F22-④
		1NO	HW①B-A1F10-④
		1NC	HW①B-A1F01-④
		1NO-1NC	HW①B-A1F11-④
		2NO	HW①B-A1F20-④
	Momentary	2NC	HW①B-A1F02-④
		2NO-2NC	HW①B-A1F22-④
	Maintained	1NO	HW①B-M2F10-④
		1NC	HW①B-M2F01-④
		1NO-1NC	HW①B-M2F11-④
		2NO	HW①B-M2F20-④
		2NC	HW①B-M2F02-④
		2NO-2NC	HW①B-M2F22-④
	Maintained	1NO	HW①B-A2F10-④
		1NC	HW①B-A2F01-④
		1NO-1NC	HW①B-A2F11-④
		2NO	HW①B-A2F20-④
		2NC	HW①B-A2F02-④
	Momentary	2NO-2NC	HW①B-A2F22-④
	Maintained	1NO	HW①B-M3F10-④
		1NC	HW①B-M3F01-④
		1NO-1NC	HW①B-M3F11-④
		2NO	HW①B-M3F20-④
		2NC	HW①B-M3F02-④
		2NO-2NC	HW①B-M3F22-④
	Maintained	1NO	HW①B-A3F10-④
		1NC	HW①B-A3F01-④
		1NO-1NC	HW①B-A3F11-④
		2NO	HW①B-A3F20-④
		2NC	HW①B-A3F02-④
	Momentary	2NO-2NC	HW①B-A3F22-④
	Maintained	1NO	HW①B-M4F10-④
		1NC	HW①B-M4F01-④
		1NO-1NC	HW①B-M4F11-④
		2NO	HW①B-M4F20-④
		2NC	HW①B-M4F02-④
		2NO-2NC	HW①B-M4F22-④
	Maintained	1NO	HW①B-A4F10-④
		1NC	HW①B-A4F01-④
		1NO-1NC	HW①B-A4F11-④
		2NO	HW①B-A4F20-④
		2NC	HW①B-A4F02-④
		2NO-2NC	HW①B-A4F22-④

- Specify a bezel shape in place of ① in the Part No.
- Specify a color code in place of ④ in the Part No.
- *1) Only B (black), G (green), R (red), Y (yellow) available for ø60mm mushroom.
- Up to 4 contacts can be used.
- For dimensions, see page 7.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Name / Shape	Operation	Contact Configuration	Part No.
ø60mm Mushroom 	Momentary	1NO	HW1B-M5F10-④
		1NC	HW1B-M5F01-④
		1NO-1NC	HW1B-M5F11-④
		2NO	HW1B-M5F20-④
		2NC	HW1B-M5F02-④
		2NO-2NC	HW1B-M5F22-④
Square flush 	Momentary	1NO	HW2B-M1F10-④
		1NC	HW2B-M1F01-④
		1NO-1NC	HW2B-M1F11-④
		2NO	HW2B-M1F20-④
		2NC	HW2B-M1F02-④
	Maintained	2NO-2NC	HW2B-M1F22-④
		1NO	HW2B-A1F10-④
		1NC	HW2B-A1F01-④
		1NO-1NC	HW2B-A1F11-④
		2NO	HW2B-A1F20-④
Square extended 	Momentary	2NC	HW2B-A1F02-④
		2NO-2NC	HW2B-A1F22-④
		1NO	HW2B-M2F10-④
		1NC	HW2B-M2F01-④
		1NO-1NC	HW2B-M2F11-④
	Maintained	2NO	HW2B-M2F20-④
		2NC	HW2B-M2F02-④
		2NO-2NC	HW2B-M2F22-④
		1NO	HW2B-A2F10-④
		1NC	HW2B-A2F01-④
	1NO-1NC	HW2B-A2F11-④	
	2NO	HW2B-A2F20-④	
	2NC	HW2B-A2F02-④	
	2NO-2NC	HW2B-A2F22-④	

Part number structure

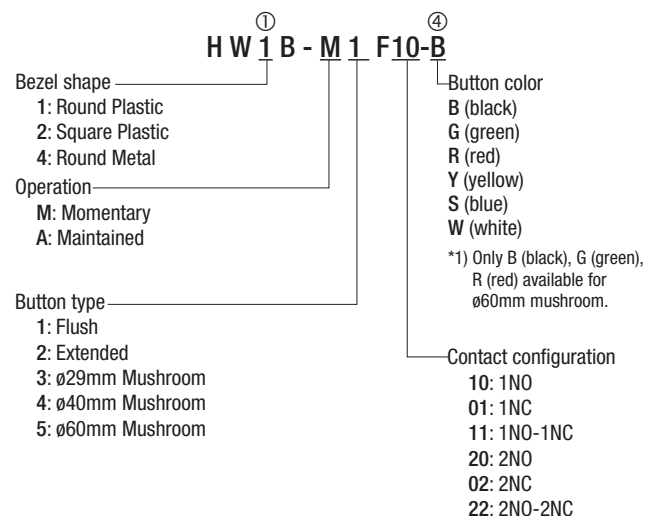


Note: The ø60mm mushroom can only be used with "1: Plastic Round(Bezel)".
 Note: The square bezel can only be used with two button types:
 1) Flush and 2) Extended.

Pushbutton Dimensions

Flush


HW1B-□1F, HW4B-□1F

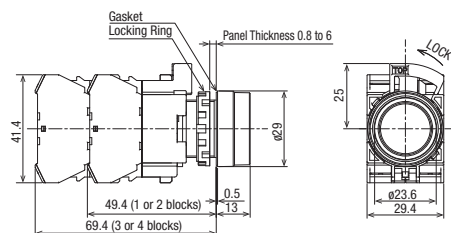

ø60mm Mushroom


HW1B-M5F

All dimensions in mm.

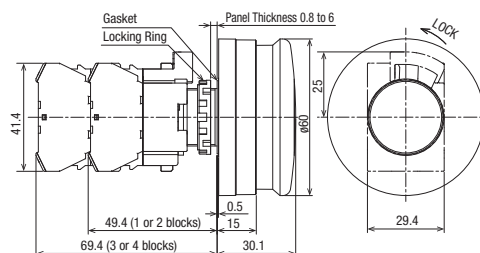


Extended

HW1B-□2F, HW4B-□2F

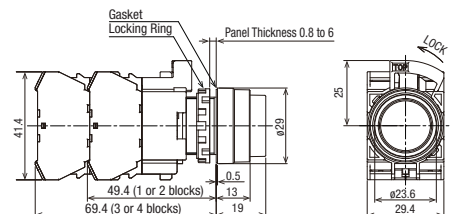


Square Flush

HW2B-□1F

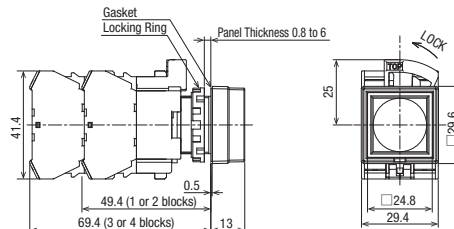


ø29mm Mushroom

HW1B-□3F, HW4B-□3F

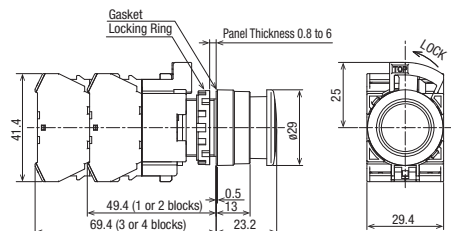


Square Extended

HW2B-□2F

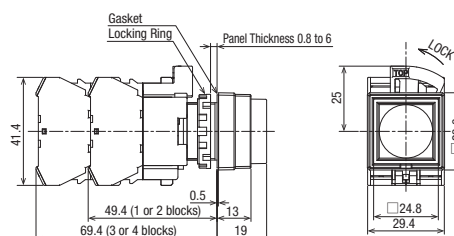


ø40mm Mushroom

HW1B-□4F, HW4B-□4F

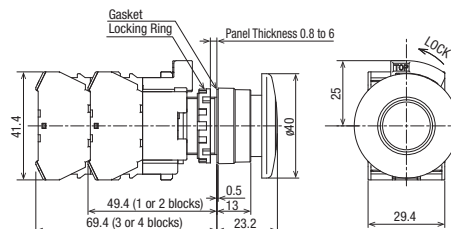

Bottom View

(for common to non-illuminated switches)

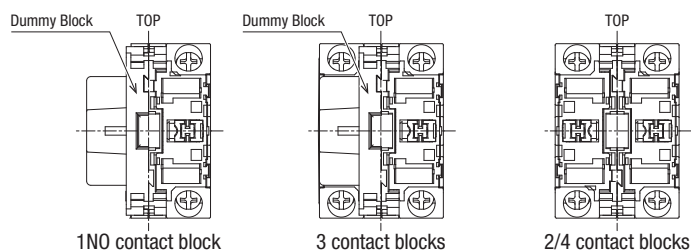

- For 1-contact (NC) configurations, the position of the contact block is reversed left to right.
- See P46 for wiring.


Illuminated Pushbuttons

Quantity: 1


Name / Shape	Operation	Contact Configuration	Part No.	Name / Shape	Operation	Contact Configuration	Part No.
 Round Flush (marking)	Momentary	1NO	HW①L-M1F10QD-④-⑥	 Square Flush (marking)	Momentary	1NO	HW2L-M1F10QD-④-⑥
		1NC	HW①L-M1F01QD-④-⑥			1NC	HW2L-M1F01QD-④-⑥
		1NO-1NC	HW①L-M1F11QD-④-⑥			1NO-1NC	HW2L-M1F11QD-④-⑥
		2NO	HW①L-M1F20QD-④-⑥			2NO	HW2L-M1F20QD-④-⑥
		2NC	HW①L-M1F02QD-④-⑥			2NC	HW2L-M1F02QD-④-⑥
		2NO-2NC	HW①L-M1F22QD-④-⑥			2NO-2NC	HW2L-M1F22QD-④-⑥
	Maintained	1NO	HW①L-A1F10QD-④-⑥		Maintained	1NO	HW2L-A1F10QD-④-⑥
		1NC	HW①L-A1F01QD-④-⑥			1NC	HW2L-A1F01QD-④-⑥
		1NO-1NC	HW①L-A1F11QD-④-⑥			1NO-1NC	HW2L-A1F11QD-④-⑥
		2NO	HW①L-A1F20QD-④-⑥			2NO	HW2L-A1F20QD-④-⑥
		2NC	HW①L-A1F02QD-④-⑥			2NC	HW2L-A1F02QD-④-⑥
		2NO-2NC	HW①L-A1F22QD-④-⑥			2NO-2NC	HW2L-A1F22QD-④-⑥
 Round Extended (marking)	Momentary	1NO	HW①L-M2F10QD-④-⑥	 ø29 Mushroom (marking)	Momentary	1NO	HW1L-M3F10QD-④-⑥
		1NC	HW①L-M2F01QD-④-⑥			1NC	HW1L-M3F01QD-④-⑥
		1NO-1NC	HW①L-M2F11QD-④-⑥			1NO-1NC	HW1L-M3F11QD-④-⑥
		2NO	HW①L-M2F20QD-④-⑥			2NO	HW1L-M3F20QD-④-⑥
		2NC	HW①L-M2F02QD-④-⑥			2NC	HW1L-M3F02QD-④-⑥
		2NO-2NC	HW①L-M2F22QD-④-⑥			2NO-2NC	HW1L-M3F22QD-④-⑥
	Maintained	1NO	HW①L-A2F10QD-④-⑥		Maintained	1NO	HW1L-A3F10QD-④-⑥
		1NC	HW①L-A2F01QD-④-⑥			1NC	HW1L-A3F01QD-④-⑥
		1NO-1NC	HW①L-A2F11QD-④-⑥			1NO-1NC	HW1L-A3F11QD-④-⑥
		2NO	HW①L-A2F20QD-④-⑥			2NO	HW1L-A3F20QD-④-⑥
		2NC	HW①L-A2F02QD-④-⑥			2NC	HW1L-A3F02QD-④-⑥
		2NO-2NC	HW①L-A2F22QD-④-⑥			2NO-2NC	HW1L-A3F22QD-④-⑥
 Round Extended with Full Shroud (marking)	Momentary	1NO	HW①L-MF2F10QD-④-⑥	 ø40 Jumbo Mushroom (marking)	Momentary	1NO	HW1L-M4F10QD-④-⑥
		1NC	HW①L-MF2F01QD-④-⑥			1NC	HW1L-M4F01QD-④-⑥
		1NO-1NC	HW①L-MF2F11QD-④-⑥			1NO-1NC	HW1L-M4F11QD-④-⑥
		2NO	HW①L-MF2F20QD-④-⑥			2NO	HW1L-M4F20QD-④-⑥
		2NC	HW①L-MF2F02QD-④-⑥			2NC	HW1L-M4F02QD-④-⑥
		2NO-2NC	HW①L-MF2F22QD-④-⑥			2NO-2NC	HW1L-M4F22QD-④-⑥
	Maintained	1NO	HW①L-AF2F10QD-④-⑥		Maintained	1NO	HW1L-A4F10QD-④-⑥
		1NC	HW①L-AF2F01QD-④-⑥			1NC	HW1L-A4F01QD-④-⑥
		1NO-1NC	HW①L-AF2F11QD-④-⑥			1NO-1NC	HW1L-A4F11QD-④-⑥
		2NO	HW①L-AF2F20QD-④-⑥			2NO	HW1L-A4F20QD-④-⑥
		2NC	HW①L-AF2F02QD-④-⑥			2NC	HW1L-A4F02QD-④-⑥
		2NO-2NC	HW①L-AF2F22QD-④-⑥			2NO-2NC	HW1L-A4F22QD-④-⑥

- Specify a bezel shape in place of ① in the Part No.
- Specify a color code in place of ④ in the Part No.
- Specify a rated voltage code in place of ⑥ in the Part No.
- Up to 4 contacts can be used.
- For dimensions, see page 9.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.


Part number structure

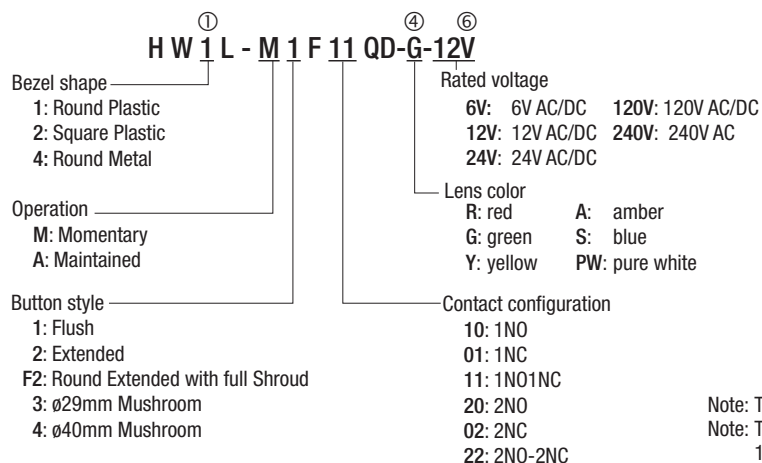


HW1L-□1F, HW4L-□1F

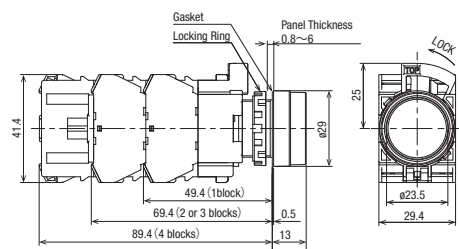


HW1L-□2F, HW4L-□2F

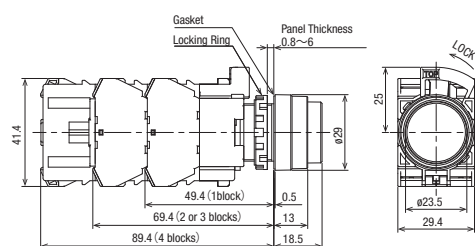


HW1L-□F2F, HW4L-□F2F

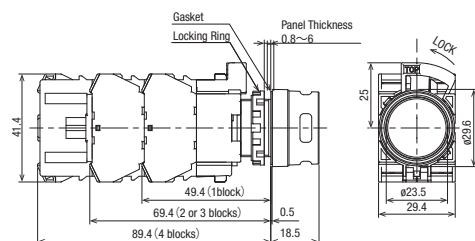


HW2L-□1F

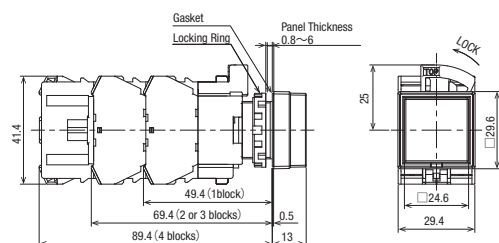

HW1L-□3F, HW4L-□3F

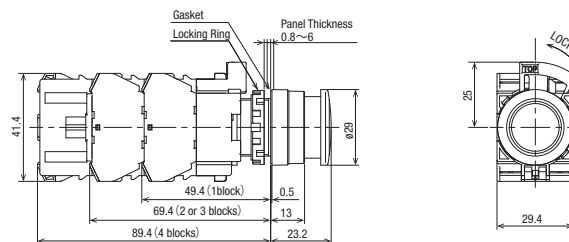

HW1L-□4F, HW4L-□4F

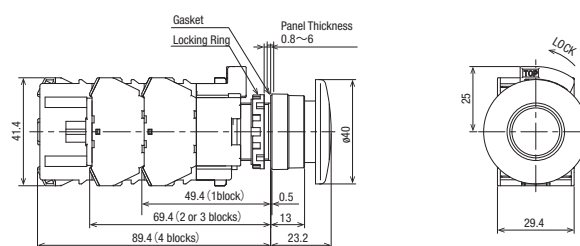

- See P46 for wiring.

Dual Pushbuttons

Without Pilot Light

Quantity: 1

Shape / Button type	Operation	Contact Configuration		Part No
		Top Button	Bottom Button	
	Momentary	1NO	1NC	HW7D-B11F1001-④⑦
		1NO	1NO	HW7D-B11F1010-④⑦
		1NO-1NC	1NO-1NC	HW7D-B11F1111-④⑦
		2NO	2NC	HW7D-B11F2002-④⑦
	Momentary	1NO	1NC	HW7D-B12F1001-④⑦
		1NO	1NO	HW7D-B12F1010-④⑦
		1NO-1NC	1NO-1NC	HW7D-B12F1111-④⑦
		2NO	2NC	HW7D-B12F2002-④⑦
	Interlocking (*)	1NO	1NC	HW7D-B21F1001-④⑦
		1NO	1NO	HW7D-B21F1010-④⑦
		1NO-1NC	1NO-1NC	HW7D-B21F1111-④⑦
		2NO	2NC	HW7D-B21F2002-④⑦
	Interlocking (*)	1NO	1NC	HW7D-B22F1001-④⑦
		1NO	1NO	HW7D-B22F1010-④⑦
		1NO-1NC	1NO-1NC	HW7D-B22F1111-④⑦
		2NO	2NC	HW7D-B22F2002-④⑦

Part number structure (without pilot light)

H W 7 D - B 1 1 F 10 10 - GR 1

Operation
1: Momentary
2: Interlocking

Button type code
1: Flush-Flush
2: Flush-Extended

Contact configuration (top button)
Contact configuration (bottom button)

Button legend
Blank: Blank
1: I & ON / O & OFF

Button color
GR: Top button: Green
Bottom button: Red
WB: Top button: White
Bottom button: Black

Top button	Bottom button	Contact configuration code	
		Top button	Bottom button
1NO	1NC	10	01
1NO	1NO	10	10
1NO-1NC	1NO-1NC	11	11
2NO	2NO	20	02

With Pilot Light

Quantity: 1

Shape / Button type	Operation	Contact Configuration		Part No
		Top Button	Bottom Button	
	Momentary	1NO	1NC	HW7D-L11F1001 ②③-④⑦
		1NO	1NO	HW7D-L11F1010 ②③-④⑦
		1NO-1NC	1NO-1NC	HW7D-L11F1111 ②③-④⑦
		2NO	2NC	HW7D-L11F2002 ②③-④⑦
	Momentary	1NO	1NC	HW7D-L12F1001 ②③-④⑦
		1NO	1NO	HW7D-L12F1010 ②③-④⑦
		1NO-1NC	1NO-1NC	HW7D-L12F1111 ②③-④⑦
		2NO	2NC	HW7D-L12F2002 ②③-④⑦
	Interlocking (*)	1NO	1NC	HW7D-L21F1001 ②③-④⑦
		1NO	1NO	HW7D-L21F1010 ②③-④⑦
		1NO-1NC	1NO-1NC	HW7D-L21F1111 ②③-④⑦
		2NO	2NC	HW7D-L21F2002 ②③-④⑦
	Interlocking (*)	1NO	1NC	HW7D-L22F1001 ②③-④⑦
		1NO	1NO	HW7D-L22F1010 ②③-④⑦
		1NO-1NC	1NO-1NC	HW7D-L22F1111 ②③-④⑦
		2NO	2NC	HW7D-L22F2002 ②③-④⑦

Part number structure (with pilot light)

H W 7 D - L 1 1 F 11 20 Q2 W - GR 1

Operation
1: Momentary
2: Interlocking

Button type
1: Flush-Flush
2: Flush-Extended

Contact configuration (top button)
Contact configuration (bottom button)

Button legend code:
Blank: Blank
1: I & ON / O & OFF

Button color code:
GR: Top Button Green
Bottom Button Red
WB: Top Button White
Bottom Button Black

a pilot lamp color code:
R: red A: amber
G: green S: blue
W: white

Rated voltage code:
Q2: 6V AC/DC, LED
Q3: 12V AC/DC, LED
Q4: 24V AC/DC, LED
Q8: 100/120V AC/DC, LED
QM4: 230/240V AC, LED


- Specify a rated voltage code in place of ② in the Part No.
- Specify a pilot lamp color code in place of ③ in the Part No.
- Specify a button color code in place of ④ in the Part No.
- Specify a legend code in place of ⑦ in the Part No.
- Up to 4 contacts can be used.
- For dimensions, see page 11.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Contact Configuration

Contact Configuration			Contact Block		Top Button		Bottom Button	
Top Button	Bottom Button	Code	Mounting Position	Contact	Normal	Push	Normal	Push
1NO	1NC	1001	(1)	NO		●		
			(2)	NC			●	
1NO	1NO	1010	(1)	NO		●		
			(2)	NO				●
1NO-1NC	1NO-1NC	1111	(1)	NO		●		
			(2)	NO				●
			(3)	NC	●			
			(4)	NC			●	
2NO	2NC	2002	(1)	NO		●		
			(2)	NC			●	
			(3)	NO		●		
			(4)	NC			●	

Contact Block Mounting Position

← Button position
← Pushbutton operation




Contact blocks (1) and (3) are actuated by the top button.
Contact blocks (2) and (4) are actuated by the bottom button.

Dual Pushbutton Dimensions


All dimensions in mm.

Without Pilot Light Flush–Flush

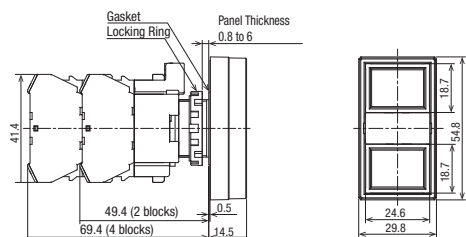


- See P7 for bottom view.
- See P46 for wiring.

Flush–Extended

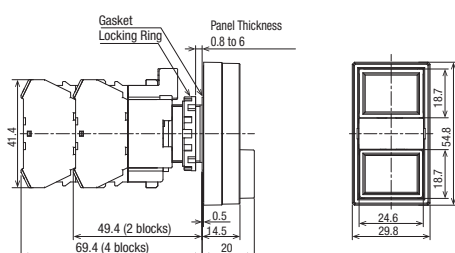


With Pilot Light Flush–Flush

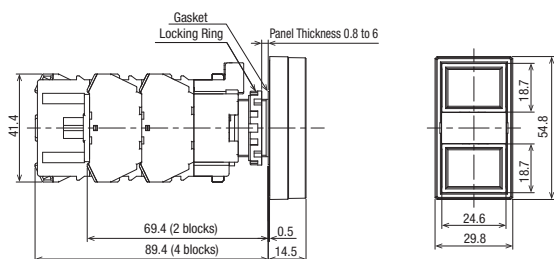

- See P9 for bottom view.
- See P46 for wiring.

Flush–Extended

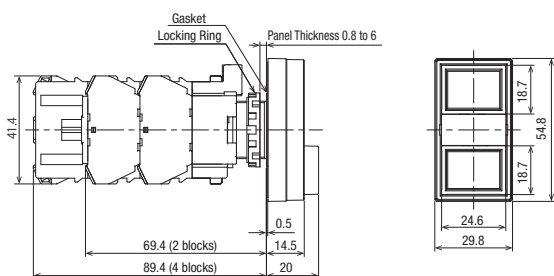

Selector Switches (Knob / Lever Operator) 3-Position


3-position

Quantity: 1

Name / Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			Cam Code	Maintained	Spring return from right	Spring return from left	Spring return two-way
			Mounting Position	Contact	1	0	2		1 0 2	1 0 2	1 0 2	1 0 2
					Part No.							
	3-position	1NO-1NC (11)	(1)	NC				—	HW①S-3③F11	HW①S-31③F11	HW①S-32③F11	HW①S-33③F11
			(2)	NO			●	—	HW①S-3③F20	HW①S-31③F20	HW①S-32③F20	HW①S-33③F20
		2NO (20)	(1)	NO	●			—	HW①S-3③F20	HW①S-31③F20	HW①S-32③F20	HW①S-33③F20
			(2)	NO			●	—	HW①S-3③F02	HW①S-31③F02	HW①S-32③F02	HW①S-33③F02
		2NC (02)	(1)	NC				—	HW①S-3③F02	HW①S-31③F02	HW①S-32③F02	HW①S-33③F02
			(2)	NC				—	HW①S-3③F02	HW①S-31③F02	HW①S-32③F02	HW①S-33③F02
		2NO-1NC (21N1) ★☆☆	(1)	NO	●			J	HW①S-3J③F21N1	—	—	—
			(2)	NO			●					
			(3)	NC		●						
			(4)	—	Dummy							
		2NO-2NC (22)	(1)	NC				—	HW①S-3③F22	HW①S-31③F22	HW①S-32③F22	HW①S-33③F22
			(2)	NO			●					
(3)			NC									
(4)			NO			●						
2NO-2NC (22N9)		(1)	NC			●	S	HW①S-3S③F22N9	—	—	—	
		(2)	NC	●								
		(3)	NO									
		(4)	NO			●						
4NO (40)		(1)	NO	●			—	HW①S-3③F40	HW①S-31③F40	HW①S-32③F40	HW①S-33③F40	
		(2)	NO			●						
		(3)	NO	●								
		(4)	NO			●						
4NC (04)		(1)	NC				—	HW①S-3③F04	HW①S-31③F04	HW①S-32③F04	HW①S-33③F04	
		(2)	NC									
	(3)	NC										
	(4)	NC										

- On the contact configuration marked with ★ in the table above, the rated load switching current is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
 - On the contact configuration marked with ☆ in the table above, contacts may overlap when the operator position is changed.
 - Specify a bezel shape in place of ① in the Part No.
 - Specify the operator type code in ⑧ in the Part No.
 - Up to 4 contacts can be used.
 - Other configurations available. See below for part number structure.
 - For sub-assembled units (operator unit / contact unit), see page 26 to 32.
- Note: Turn the operator to each position accurately.

Contact Block Mounting Position



Part number structure

HW ① S - 3 J ⑧ F 10

1: Plastic Bezel
4: Metal Bezel

Operator position
3: 3-position, maintained
31: 3-position, spring return from right
32: 3-position, spring return from left
33: 3-position, spring return two way

Contact configuration (See table above)

Operator type
T: Knob operator
L: Lever operator

Cam code:
J: Specified (Operator position: 3 only)
Blank: Not specified

Operator position

Maintained (45° 3-position)	Spring Return (45° 3-position)		
			
Cam code: Blank, J	Cam code: blank		

Selector Switches (Knob / Lever Operator) 4-Position, 5-Position

4-position

Quantity: 1

Name / Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position				Cam Code	Maintained
			Mounting Position	Contact	1	2	3	4		
Part No.										
 Lever Operator	4-position	1NO-2NC (12) ★☆☆	(1)	NO	●				—	HW①S-4⑧F12
			(2)	NC		●				
			(3)	NC			●			
			(4)	—	Dummy					
		1NO-3NC (13N6) ★☆☆	(1)	NC		●			—	HW①S-4⑧F13N6
			(2)	NC		●				
			(3)	NC			●			
			(4)	NO				●		
		2NO-2NC (22N3) ★☆☆	(1)	NO	●				—	HW①S-4⑧F22N3
			(2)	NC		●				
			(3)	NC			●			
			(4)	NO				●		

5-position


Quantity: 1

Name / Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position					Cam Code	Maintained
			Mounting Position	Contact	1	2	3	4	5		Part No.
	5-position	2NO-2NC (22N3) ★☆	(1)	NO	●					—	HW①S-5⑧F22N3
			(2)	NC		●					
			(3)	NC			●				
			(4)	NO				●			

- On the contact configuration marked with ★ in the table above, the rated load switching current is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- On the contact configuration marked with ☆ in the table above, contacts may overlap when the operator position is changed.
- Specify a bezel shape in place of ① in the Part No.
- Specify the operator type code in ⑧ in the Part No.
- Up to 4 contacts can be used.
- Other configurations available. See below for part number structure.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Note: Turn the operator to each position accurately.

Contact Block Mounting Position



Part number structure


HW ① S - 4 ⑧ F 12

1: Plastic Bezel
4: Metal Bezel

Operator position
4: 4-position, maintained
5: 5-position, maintained

Contact configuration (See table above)
Operator type
T: Knob operator
L: Lever operator

Operator position for 4-position

Maintained	Spring Return			
				

Operator position for 5-position

Maintained	Spring Return				
					

Key Selector Switches (Disc Tumbler Key) 2-Position

2-position


Quantity: 1

Name / Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position		Cam Code	Maintained (90° 2-position)	Spring Return (60° 2-position)
			Mounting Position	Contact	1	2		1	2
									
Part No.									
	2-position	1NO (10)	(1)	NO		●	—	HW①K-2AF10	HW①K-21BF10
			(2)	—	Dummy				
		1NC (01)	(1)	NC	●			HW①K-2AF01	HW①K-21BF01
			(2)	—	Dummy				
		1NO-1NC (11)	(1)	NO		●		HW①K-2AF11	HW①K-21BF11
			(2)	NC	●				
		2NO (20)	(1)	NO		●		HW①K-2AF20	HW①K-21BF20
			(2)	NO		●			
		2NC (02)	(1)	NC	●			HW①K-2AF02	HW①K-21BF02
			(2)	NC	●				
		2NO-2NC (22)	(1)	NO		●		HW①K-2AF22	HW①K-21BF22
			(2)	NC	●				
(3)	NO			●					
(4)	NC		●						

2-position Reversed Cam

Name / Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position		Cam Code	Maintained
			Mounting Position	Contact	1 	2 		2 1 
	2-position	2NC (02)	(1)	NC		●	J	HW⓪K-2JAF02
			(2)	NC		●		
		3NC (03)	(1)	NC		●		HW⓪K-2JAF03
			(2)	NC		●		
			(3)	NC		●		
			(4)	—	Dummy			

Contact Block Mounting Position



- Each selector key switch is supplied with two keys. Different key numbers are available. See part number structure.
- Specify a bezel shape in place of ① in the Part No.
- Up to 4 contacts can be used.
- Other configurations available. See below for part number structure.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Note: Turn the operator to each position accurately.

Part number structure

HW ① K - 2 J A F 01 - 501

1: Plastic Bezel
4: Metal Bezel

Operator position
2: 2-position, maintained
21: 2-position, spring return from right



Cam
J: Specified (Operator position: 2 only)
Blank: Not specified

Key number
Disc tumbler key
Blank: Standard (231)
-1H to -3H(non-standard)
*For key numbers other than the standard key number, contact IDEC.
Note: The key number is engraved on the key cylinder for non-standard keys.


Contact configuration (See table above)

Key removal position
A: Removable in all positions
B: Removable in the left only
C: Removable in the right only




Operator position

Maintained (90° 2-position)	Spring Return (60° 2-position)
	
Cam code: blank	Cam code: J

Key removal position

Key Retained Position (Cam code: blank)		
A: Key removable in all positions	B: Key removable at left	C: Key removable at right
		

① ② : Key removal position ① ② : Key retained position

Key Retained Position (Cam code: J)		
A: Key removable in all positions	B: Key removable at left	C: Key removable at right
		

Note: The key cannot be removed in a spring return position.

Key Selector Switches (Disc Tumbler Key) 3-Position

3-position


Quantity: 1

Name / Shape	No. of Positions	Contact Configuration (Code)	Contact Block		Operator Position			Cam Code	Maintained	Spring return from right	Spring return from left	Spring return two-way
			Mounting Position	Contact	1	0	2		1 0 2	1 0 2	1 0 2	1 0 2
	3-position	1NO-1NC (11)	(1)	NC				—	HW①K-3AF11	HW①K-31BF11	HW①K-32CF11	HW①K-33DF11
			(2)	NO				—				
		2NO (20)	(1)	NO	●			—	HW①K-3AF20	HW①K-31BF20	HW①K-32CF20	HW①K-33DF20
			(2)	NO			●	—				
		2NC (02)	(1)	NC				—	HW①K-3AF02	HW①K-31BF02	HW①K-32CF02	HW①K-33DF02
			(2)	NC				—				
		2NO-1NC (21N1) ★☆	(1)	NO	●			J	HW①K-3JAF21N1	—	—	—
			(2)	NO			●	J				
			(3)	NC		●		J				
			(4)	—	Dummy			J				
		2NO-2NC (22)	(1)	NC				—	HW①K-3AF22	HW①K-31BF22	HW①K-32CF22	HW①K-33DF22
			(2)	NO			●	—				
			(3)	NC				—				
			(4)	NO			●	—				
		2NO-2NC (22N9)	(1)	NC	●			S	HW①K-3SAF22N9	—	—	—
			(2)	NC				S				
			(3)	NO			●	S				
			(4)	NO			●	S				
		4NO (40)	(1)	NO	●			—	HW①K-3AF40	HW①K-31BF40	HW①K-32CF40	HW①K-33DF40
			(2)	NO			●	—				
			(3)	NO	●			—				
			(4)	NO			●	—				
		4NC (04)	(1)	NC			●	—	HW①K-3AF04	HW①K-31BF04	HW①K-32CF04	HW①K-33DF04
			(2)	NC	●			—				
			(3)	NC			●	—				
			(4)	NC	●			—				

- On the contact configuration marked with ★ in the table above, the rated load switching current is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- On the contact configuration marked with ☆ in the table above, contacts may overlap when the operator position is changed.
- Each selector key switch is supplied with two keys. Different key numbers are available. See part number structure.
- Specify a bezel shape in place of ① in the Part No.
- Up to 4 contacts can be used.
- Other configurations available. See below for part number structure.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Note: Turn the operator to each position accurately.

Contact Block Mounting Position



Part number structure

HW ① K - 3 J A F 11 -1H	
1: Plastic Bezel	Key number
4: Metal Bezel	Disc tumbler key
	Blank: Standard (231)
	-1H to -3H(non-standard)
Operator position	*For key numbers other than the standard key number, contact IDEC.
3: 3-position, maintained	Note: The key number is engraved on the key cylinder for non-standard keys.
31: 3-position, spring return from right	Contact configuration
32: 3-position, spring return from left	(See table above)
33: 3-position, spring return two way	Key removal position
Cam	A: Removable in all positions
J: Specified (Operator position: 3 only)	E: Removable in right and left
Blank: Not specified	B: Removable in the left and center
S: Specified (Operator position: 3 only)	G: Removable in left only
	C: Removable in the right and center
	H: Removable in right only
	D: Removable in center only

Operator position

Maintained (45° 3-position)	Spring Return (45° 3-position)		
			
Cam code: Blank, J	Cam code: blank		

Key removal position

Key Retained Position			
A: Key removable in all positions 	B: Key removable at left / center 	C: Key removable at center / right 	D: Key removable at center 
E: Key removable at right / left 	G: Key removable at left 	H: Key removable at right 	

①①② : Key removal position ①①② : Key retained position
Note: The key cannot be removed in a spring return position.

Illuminated Selector Switches (Knob / Lever Operator) (LED) 2-Position

2-position


Quantity: 1

Name / Shape	No. of Positions	Contact Configuration	Contact Block		Operator Position		Cam Code	Maintained (90° 2-position)	Spring Return (60° 2-position)
			Mounting Position	Contact	1	2			
								Part No.	
Knob operator  Lever operator 	2-position	1NO (10)	(1)	NO		●	—	HW①F-2⑧F10QD-④-⑥	HW①F-21⑧F10QD-④-⑥
			(2)	—	Dummy				
		1NO-1NC (11)	(1)	NO		●	—	HW①F-2⑧F11QD-④-⑥	HW①F-21⑧F11QD-④-⑥
			(2)	NC	●				
		2NO (20)	(1)	NO		●	—	HW①F-2⑧F20QD-④-⑥	HW①F-21⑧F20QD-④-⑥
			(2)	NO		●			
		2NO-2NC (22)	(1)	NO		●	—	HW①F-2⑧F22QD-④-⑥	HW①F-21⑧F22QD-④-⑥
			(2)	NC	●				
			(3)	NO		●			
			(4)	NC	●				

- Specify a bezel shape in place of ① in the Part No.
- Specify a color code in place of ④ in the Part No.
- Specify a rated voltage code in place of ⑥ in the Part No.
- Specify the operator type code in ⑧ in the Part No.
- Up to 4 contacts can be used.
- Other configurations available. See below for part number structure.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Note: Turn the operator to each position accurately.


Part number structure

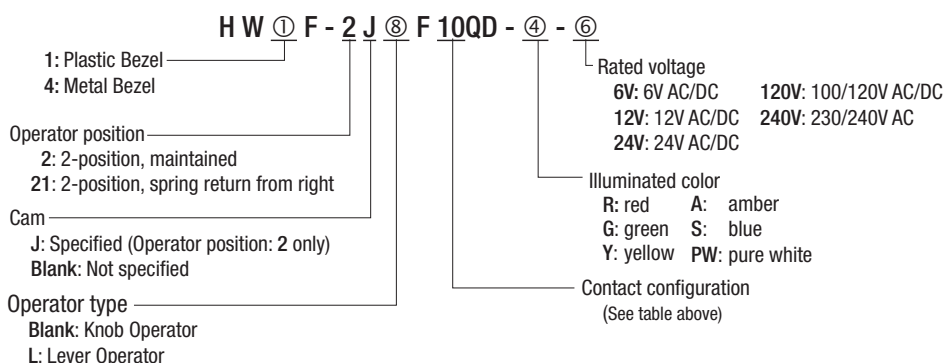

Operator position

Maintained (90° 2-position)		Spring Return (60° 2-position)
1 2	2 1	Spring Return from Right 1 2
Cam code: blank	Cam code: J	Cam code: blank

Contact Block Mounting Position



Illuminated Selector Switches (Knob / Lever Operator) (LED) 3-Position

3-position

Quantity: 1

Name / Shape	No. of Positions	Contact Configuration	Contact Block		Operator Position			Maintained	Spring return from right	Spring return from left	Spring return two-way
			Mounting Position	Contact	1	0	2	1 0 2	1 0 2	1 0 2	1 0 2
 	3-position	1NO-1NC (11)	(1)	NC				HW①F-3⑧F11QD-④-⑥	HW①F-31⑧F11QD-④-⑥	HW①F-32⑧F11QD-④-⑥	HW①F-33⑧F11QD-④-⑥
			(2)	NO			●				
		2NO (20)	(1)	NO	●			HW①F-3⑧F20QD-④-⑥	HW①F-31⑧F20QD-④-⑥	HW①F-32⑧F20QD-④-⑥	HW①F-33⑧F20QD-④-⑥
			(2)	NO			●				
		2NC (02)	(1)	NC				HW①F-3⑧F02QD-④-⑥	HW①F-31⑧F02QD-④-⑥	HW①F-32⑧F02QD-④-⑥	HW①F-33⑧F02QD-④-⑥
			(2)	NC							
		2NO-2NC (22)	(1)	NC				HW①F-3⑧F22QD-④-⑥	HW①F-31⑧F22QD-④-⑥	HW①F-32⑧F22QD-④-⑥	HW①F-33⑧F22QD-④-⑥
			(2)	NO			●				
			(3)	NC							
			(4)	NO			●				
		4NO (40)	(1)	NO	●			HW①F-3⑧F40QD-④-⑥	HW①F-31⑧F40QD-④-⑥	HW①F-32⑧F40QD-④-⑥	HW①F-33⑧F40QD-④-⑥
			(2)	NO			●				
			(3)	NO	●						
			(4)	NO			●				
		4NC (04)	(1)	NC			●	HW①F-3⑧F04QD-④-⑥	HW①F-31⑧F04QD-④-⑥	HW①F-32⑧F04QD-④-⑥	HW①F-33⑧F04QD-④-⑥
			(2)	NC	●						
			(3)	NC			●				
			(4)	NC	●						

- Specify a bezel shape in place of ① in the Part No.
 - Specify a color code in place of ④ in the Part No.
 - Specify a rated voltage code in place of ⑥ in the Part No.
 - Specify the operator type code in ⑧ in the Part No.
 - Up to 4 contacts can be used.
 - Other configurations available. See below for part number structure.
 - For sub-assembled units (operator unit / contact unit), see page 26 to 32.
- Note: Turn the operator to each position accurately.


Part number structure

HW ① F - 3 J ⑧ F 11QD - ④ - ⑥	
1: Plastic Bezel	Rated voltage
4: Metal Bezel	6V: 6V AC/DC
	12V: 12V AC/DC
	24V: 24V AC/DC
	120V: 100/120V AC/DC
	240V: 230/240V AC
Operator position	Illumination color
3: 3-position, maintained	R: red
31: 3-position, spring return from right	A: amber
32: 3-position, spring return from left	G: green
33: 3-position, spring return two-way	S: blue
Cam	Y: yellow
J: Specified (Operator position: 3 only)	PW: pure white
Blank: Not specified	
Operator	Contact configuration
Blank: Knob operator	(See table above)
L: Lever operator	

Operator position

Maintained (45° 3-position)	Spring Return (45° 3-position)		
1 0 2	Spring return from right	Spring return from left	Spring return two-way
Cam code: Blank, J	Cam code: blank	Cam code: blank	Cam code: blank

Contact Block Mounting Position





Selector Switches Dimensions

Dimensions

All dimensions in mm.

Knob Operator





- See **P7** for bottom view.
- See **P46** for wiring.

Key Selector Switch Dimensions

Dimensions

All dimensions in mm.

Disc tumbler key



- See **P7** for bottom view.
- See **P46** for wiring.





Illuminated Selector Switches (Knob / Lever Operator) (LED)

Dimensions

Lever operator

All dimensions in mm.

Knob operator



- See **P9** for bottom view.
- See **P46** for wiring.

Selector Pushbuttons

Quantity: 1

Name / Shape	Circuit Code	Contact Configuration (Code)	Contact Block		Left		Right		Part No.
			Mounting Position	Contact	Normal	Push	Normal	Push	
	A	1NO-1NC (11)	(1)	NO		●		●	HW1R-2AF11-④
			(2)	NC	●				
		2NO (20)	(1)	NO		●		●	HW1R-2AF20-④
			(2)	NO		●	■		
		2NO-2NC (22)	(1)	NO		●		●	HW1R-2AF22-④
			(2)	NC	●				
			(3)	NO		●		●	
	D	2NO (20)	(1)	NO		●		●	HW1R-2DF20-④
			(2)	NO					
		2NO-2NC (22N1)	(1)	NO		●		●	HW1R-2DF22N1-④
			(2)	NO					
			(3)	NC	●		■		
			(4)	NC	■		●		
	E	2NO-2NC (22N1) ★	(1)	NO		●		●	HW1R-2EF22N1-④
			(2)	NO					
			(3)	NC			■		
			(4)	NC	■				
	F	2NO-2NC (22N1) ★☆	(1)	NO				●	HW1R-2FF22N1-④
			(2)	NO		●			
			(3)	NC			●		
			(4)	NC	●				
	N	2NO-2NC (22N2) ★☆	(1)	NC			●		HW1R-2NF22N2-④
			(2)	NO		●		●	
			(3)	NC			●		
			(4)	NO		●		●	
	T	2NO-2NC (22N1)	(1)	NO		●	●	Operation Blocked	HW1R-2TF22N1-④
			(2)	NO		●	●		
			(3)	NC	●				
			(4)	NC	●				

- Specify a color code in place of ④ in the Part No.
- On the contact arrangement marked with ★ in the table above, the rated load switching current is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator position is changed.
- When operating the pushbutton selector, do not turn the operator ring or the lock lever while the button is depressed. Otherwise the pushbutton selector may be damaged.
- Up to 4 contacts can be used.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Part number structure

HW1R - 2 D F 20 - ④


Circuit (See table above) Button color

Contact configuration

11: 1NO1NC	11N1: 1NO-1NC	R: red
20: 2NO	22N2: 2NO-2NC	G: green
22: 2NO-2NC	22N1: 2NO-2NC	Y: yellow
		S: blue
		W: White
		B: Black


Dimensions

All dimensions in mm.

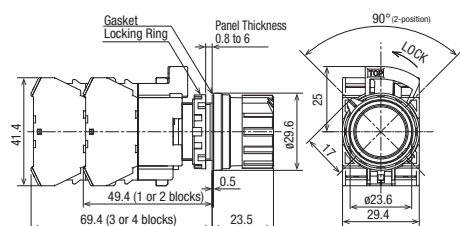

- See P7 for bottom view.
- See P46 for wiring.

Contact Block Mounting Position



Mounting Position	Contact	Left		Right		← Ring Position ← Button
		Normal	Push	Normal	Push	
(1)	NO		●		●	
(2)	NO	●				
(3)	NC		●		●	
(4)	NC	●				

Monolever Switches

Quantity: 1

Name / Shape	Positions	Part No.
 HW1M Standard	2-position	HW1M-F1010-20
		HW1M-F2020-20
		HW1M-F0101-20
		HW1M-F0202-20
		HW1M-F0101-40
		HW1M-F0202-40
	4-position	HW1M-F1111-22N9
		HW1M-F2222-22N9

Name / Shape	Positions	Part No.
 HW1M-L Interlocking	2-position	HW1M-LF1010-20
		HW1M-LF2020-20
		HW1M-LF0101-20
		HW1M-LF0202-20
		HW1M-LF0101-40
		HW1M-LF0202-40
	4-position	HW1M-LF1111-22N9
		HW1M-LF2222-22N9

- On all mono-lever switches, the rated current (load switching current) is reduced to a half of the rated current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- Up to 4 contacts can be used.
- Other configurations available. See below for part number structure.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Part number structure

H W 1 M - L F 1 0 1 0 - 20

Type
 HW1M: Standard
 HW1M-L: Interlocking

Lever operation
 Order of Entry
 Up - Right - Down - Left
 1: Maintained
 2: Spring returned
 0: Blocked

Contact configuration
 Select a required contact operation at each lever operator position from the contact arrangement charts below and specify the Contact Code.

Lever operation



Note

- The lever operator of the HW1M-L interlocking type can be locked only in the center position. Pull the interlocking lever, and then operate the lever up/down/right/left.

Contact Configuration

2-position (Right/Left)

Contact Code	Contact Block		Lever Operator Position		
	Mounting Position	Contact	Left	Center	Right
20	(1)	NO	●		
	(2)	NO			●
40	(1)	NO	●		
	(2)	NO			●
	(3)	NO	●		
	(4)	NO			●

2-position (Up/Down)

Contact Code	Contact Block		Lever Operator Position		
	Mounting Position	Contact	Left	Center	Right
20	(1)	NO	●		
	(2)	NO			●
40	(1)	NO	●		
	(2)	NO			●
	(3)	NO	●		
	(4)	NO			●

4-position


Contact Code	Contact Block		Lever Operator Position				
	Mounting Position	Contact	Down	Left	Center	Up	Right
22N9	(1)	NC					●
	(2)	NC	●				
	(3)	NO		●			
	(4)	NO				●	

Monolever Switches


Dimensions

All dimensions in mm.

Standard

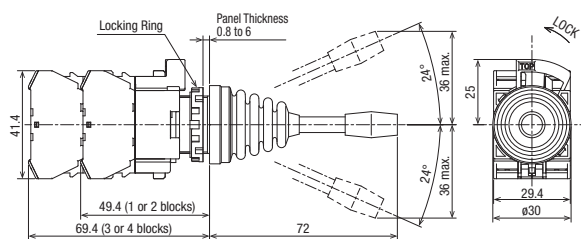

Interlocking

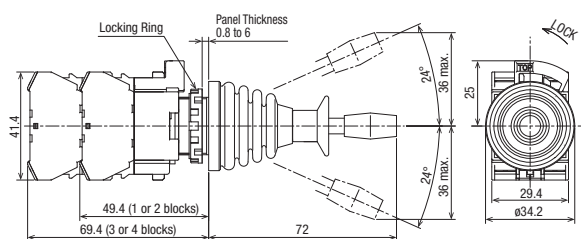

- See P7 for bottom view.
- See P46 for wiring.


Emergency Stop Switches

Emergency Stop Switches

- Direct opening action (IEC 60947-5-5; 5.2, IEC 60947-5-1; Annex K)
- Safety lock mechanism (IEC 60947-5-5; 6.2)
- Degree of Protection IP65 (IEC 60529)



- See website for details on approvals and standards.

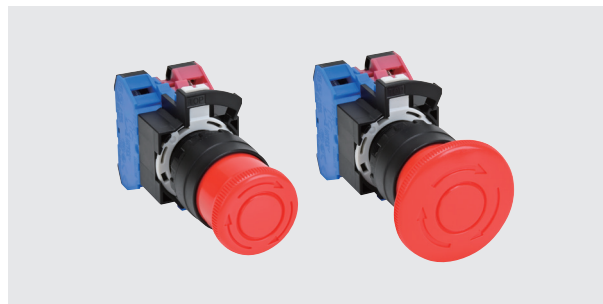


Specifications

Operating Temperature		–25 to +60°C (no freezing)
Operating Humidity		45 to 85% RH (no condensation)
Storage Temperature		–40 to +80°C (no freezing)
Minimum Force Required for Direct Opening Action		80N (Pushlock switches) 50N (Push-pull switches)
Minimum Operator Stroke Required for Direct Opening Action		6.0mm
Maximum Operator Stroke		10.0mm
Contact Resistance		50 mΩ maximum (initial value)
Insulation Resistance		100 MΩ minimum (500V DC megger)
Dielectric Strength		Between live and dead parts: 2500V AC, 1 minute Between terminals of different poles: 2500V AC, 1 minute Bet ween terminals of the same poles: 2500V AC, 1 minute
Vibration Resistance	Damage limits	30 Hz, Amplitude 1.5 mm
	Operating extremes	5 to 55 Hz, Amplitude 0.5 mm
Shock Resistance	Damage limits	1,000 m/s ²
	Operating extremes	100 m/s ²
Operation Frequency		900 operations/hour
Life	Mechanical	Pushlock turn reset / key reset: 500,000 operations minimum Push–Pull: 250,000 operations minimum
	Electrical	Pushlock turn reset / key reset: 500,000 operations minimum Push–Pull: 250,000 operations minimum (at 900 operations/h, duty ratio 40%)
Degree of Protection		IP65 (IEC 60529), UL Type 4X
Short-circuit Protection		250V/10A fuse (Type aM IEC 60269-1/IEC 60269-2)
Weight (approx.)		76g (HW1B-V322) 99g (HW1B-X422R) 54g (HW1B-Y202) 79g (HW1B-V422R-EMO)

Mounting Hole Layout

All dimensions in mm.



Minimum Mounting Centers for HW1B (emergency stop switch)

	Vertical Spacing	Horizontal Spacing
HW1B-V3 HW1B-V4 HW1B-Y2	50 mm minimum	50 mm minimum
HW1B-V5	60 mm minimum	60 mm minimum

- The minimum mounting centers of HW1B (pushbuttons) and each HW series emergency stop switches are shown. For other button shapes, refer to the dimensions and take wiring and operation of switches into consideration.

Nameplate (for ø22 mm Emergency Stop Switches)

Quantity: 1

Shape	Legend	Part No.	Remarks
	(blank)	HWAV-0-Y	HWAV-27-Y Nameplate color: yellow Legend color: black Panel thickness: 0.8 to 4.5 mm Material: Polyamide
	EMERGENCY STOP	HWAV-27-Y	

- "EMERGENCY OFF" and white (blank) nameplates available. See website or catalog for SEMI Emergency off (EMO) switches and Stop switches.

Note) For machinery subject to ISO/IEC standards such as machine tools and food machinery, in compliant with the revised ISO13850, it is not recommended to display texts or symbols such as EMERGENCY STOP on the actuator or nameplate of an emergency stop device.

Emergency Stop Switches


Pushlock Turn Reset

Name / Shape	Contact Configuration	Part No.
ø29mm Mushroom HW1B-V3, HW4B-V3 	1NO	HW①B-V3F10-④
	1NC	HW①B-V3F01-④
	1NO-1NC	HW①B-V3F11-④
	2NO	HW①B-V3F20-④
	2NC	HW①B-V3F02-④
ø40mm Mushroom HW1B-V4, HW4B-V4 	1NO	HW①B-V4F10-④⑨
	1NC	HW①B-V4F01-④⑨
	1NO-1NC	HW①B-V4F11-④⑨
	2NO	HW①B-V4F20-④⑨
ø60mm Mushroom HW1B-V5 	1NO	HW1B-V5F10-R
	1NC	HW1B-V5F01-R
	1NO-1NC	HW1B-V5F11-R
	2NO	HW1B-V5F20-R
	2NC	HW1B-V5F02-R

*Available in red only.

- Specify a bezel shape in place of ① in the Part No.
- Specify a color code in place of ④ in the Part No.
- Specify an engraved button in place of ⑨ in the Part No.
- Pushlock turn reset – Button is maintained when pressed and is reset when turned clockwise.
- Push-Pull – 2-position switches with button maintained in both depressed and reset positions.
- Up to 4 contacts can be used.
- For emergency stop purposes, these switches must contain at least one NC contact block.
- For sub-assembled units (operator unit / contact unit), see page 26 to 32.

Part number structure

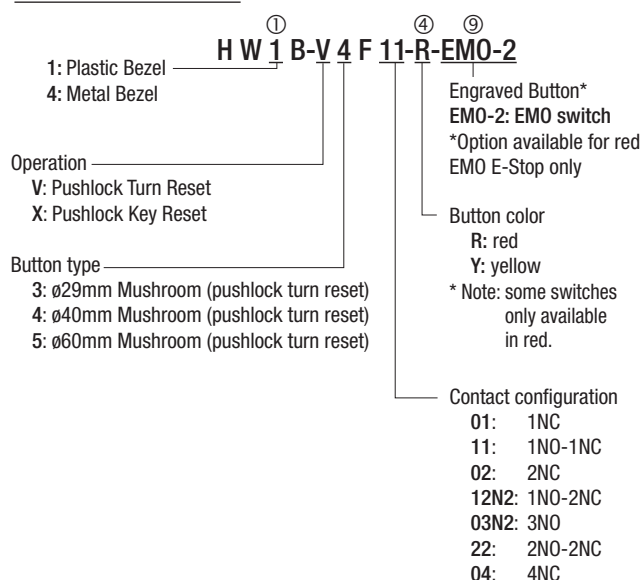

Pushlock Turn Reset

Quantity: 1


Name / Shape	Contact Configuration	Part No.
ø40mm Key Reset* HW1B-X4, HW4B-X4 	1NO	HW①B-X4F10-R
	1NC	HW①B-X4F01-R
	1NO-1NC	HW①B-X4F11-R
	2NO	HW①B-X4F20-R
	2NC	HW①B-X4F02-R

*Available in red only.

Push Pull

Name / Shape	Contact Configuration	Part No.
ø40mm Mushroom HW1B-Y2, HW4B-Y2 	1NO	HW①B-Y2F10-④
	1NC	HW①B-Y2F01-④
	1NO-1NC	HW①B-Y2F11-④
	2NO	HW①B-Y2F20-④
	2NC	HW①B-Y2F02-④

Part number structure

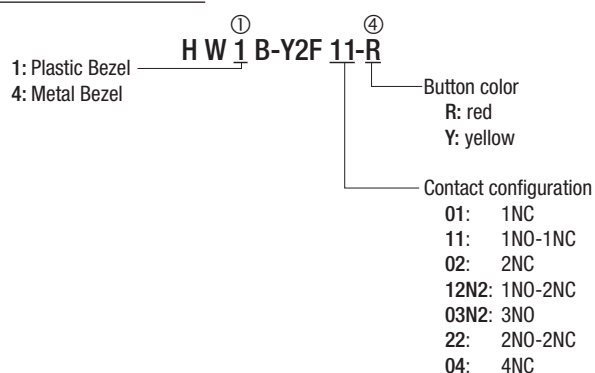


Emergency Stop Switch Dimensions


Dimensions

All dimensions in mm.


ø29mm Mushroom Pushlock Turn Reset HW1B-V3, HW4B-V3

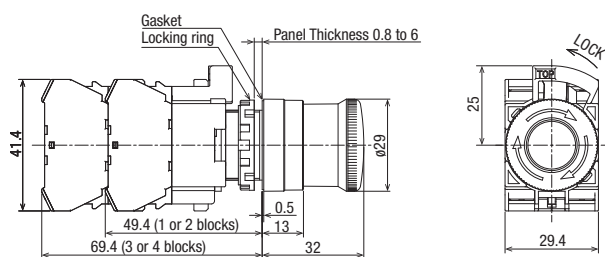


ø40 mm Mushroom Pushlock Turn Reset HW1B-V4, HW4B-V4

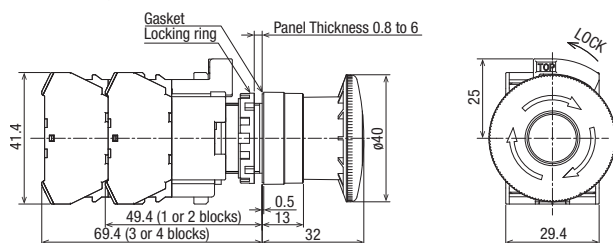

ø60mm Mushroom Pushlock Turn Reset HW1B-V5

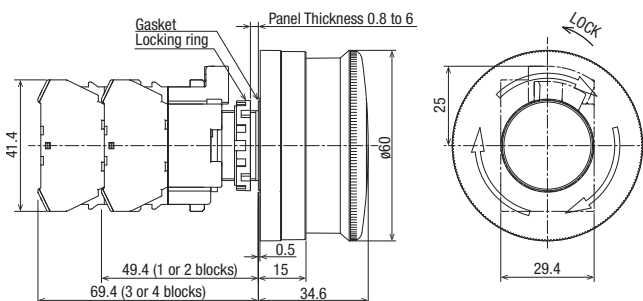

ø40mm Mushroom Push Pull (2-position) HW1B-Y2, HW4B-Y2

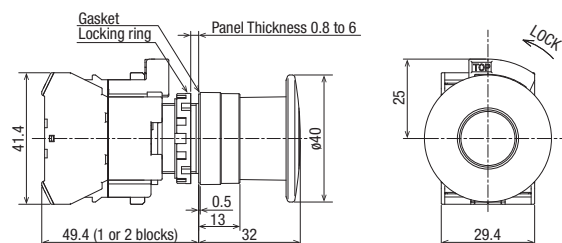

- See P7 for bottom view.
- See P46 for wiring.

ø22 HW Series

Sub-Assembled Products



ø22 HW Series Sub-Assembled Products

Operator Unit

Pushbutton operator

Quantity: 1

Name / Shape	Plastic Bezel	Metal Bezel
	Part No.	
Round Flush 	HW1B-M1④-PS-U	HW4B-M1④-PS-U
	HW1B-A1④-PS-U	HW4B-A1④-PS-U
Round Extended 	HW1B-M2④-PS-U	HW4B-M2④-PS-U
	HW1B-A2④-PS-U	HW4B-A2④-PS-U
ø29mm Mushroom 	HW1B-M3④-PS-U	HW4B-M3④-PS-U
	HW1B-A3④-PS-U	HW4B-A3④-PS-U
ø40mm Mushroom 	HW1B-M4④-PS-U	HW4B-M4④-PS-U
	HW1B-A4④-PS-U	HW4B-A4④-PS-U

- Specify the button color code in place of ④ in the Part No.

Name / Shape	Part No.
ø60mm Mushroom 	HW1B-M5④-PS-U
Square Flush 	HW2B-M1④-PS-U
	HW2B-A1④-PS-U
Square Extended 	HW2B-M2④-PS-U
	HW2B-A2④-PS-U

Part number structure

HW1B-M1④-PS-U	
Bezel shape	Button color
1: Plastic Round	B: black Y: yellow
2: Plastic Square	G: green S: blue
4: Metal Round	R: red W: white
Operation	Note: Only B (black), G (green), and R (red) available for ø60mm mushroom.
M: Momentary	
A: Maintained	Note: The ø60mm mushroom can only be used with "1: Plastic Round(Bezel)". Note: The square bezel can only be used with two button types: 1) Flush and 2) Extended.
Button type	
1: Flush	
2: Extended	
3: ø29mm Mushroom	
4: ø40mm Mushroom	
5: ø60mm Mushroom	

Illuminated Pushbutton operator

Name / Shape	Plastic Bezel	Metal Bezel
	Part No.	
Round Flush (marking) 	HW1L-M1④-PS-U	HW4L-M1④-PS-U
	HW1L-A1④-PS-U	HW4L-A1④-PS-U
Round Extended (marking) 	HW1L-M2④-PS-U	HW4L-M2④-PS-U
	HW1L-A2④-PS-U	HW4L-A2④-PS-U
Round Extended with Full Shroud (marking) 	HW1L-MF2④-PS-U	HW4L-MF2④-PS-U
	HW1L-AF2④-PS-U	HW4L-AF2④-PS-U
ø29 Mushroom (marking) 	HW1L-M3④-PS-U	HW4L-M3④-PS-U
	HW1L-A3④-PS-U	HW4L-A3④-PS-U
ø40 Jumbo Mushroom (marking) 	HW1L-M4④-PS-U	HW4L-M4④-PS-U
	HW1L-A4④-PS-U	HW4L-A4④-PS-U
Square Flush (marking) 	HW2L-M1④-PS-U	—
	HW2L-A1④-PS-U	—

- Specify the button color code in place of ④ in the Part No.

Part number structure

HW1L-M1④-G-PS-U	
Bezel shape	Illumination button color
1: Plastic Round	G: green A: Amber
2: Plastic Square	R: red S: blue
4: Metal Round	Y: yellow PW: Pure white
Operation	Button type
M: Momentary	1: Flush
A: Maintained	2: Extended
	F2: Round Extended with full Shroud
	3: ø29mm Mushroom
	4: ø40mm Mushroom

- Note: The Plastic Square can only be used with "1: Flush(Button)".
 Note: The square bezel can only be used with two button types:
 1) Flush and 2) Extended.

Operator Unit


Quantity: 1

Dual pushbutton operator (without pilot light)

Shape	Part No.
	HW7D-B11⑥⑦-PS-U
	HW7D-B12⑥⑦-PS-U
	HW7D-B21⑥⑦-PS-U
	HW7D-B22⑥⑦-PS-U

• Specify a code in place of ⑥ and ⑦ in the Part No.

Part number structure

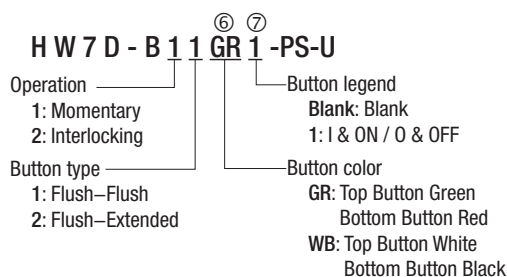


Dual pushbutton operator (with pilot light)

Shape	Part No.
	HW7D-L11PW⑥⑦-PS-U
	HW7D-L12PW⑥⑦-PS-U
	HW7D-L21PW⑥⑦-PS-U
	HW7D-L22PW⑥⑦-PS-U

• Specify a code in place of ⑥ and ⑦ in the Part No.

Part number structure

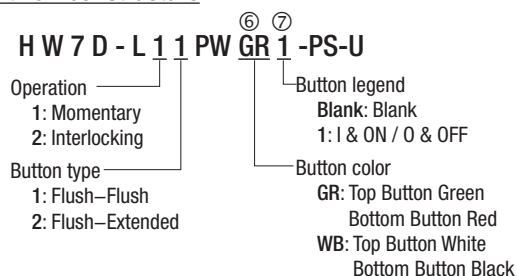


Selector switch operator

Name / Shape	Plastic Bezel	Metal Bezel
	Part No.	
Knob 	HW1S-⑨⑩T-PS-U	HW4S-⑨⑩T-PS-U
Lever 	HW1S-⑨⑩L-PS-U	HW4S-⑨⑩L-PS-U

• Specify a code in place of ⑨ and ⑩ in the Part No.

Part number structure

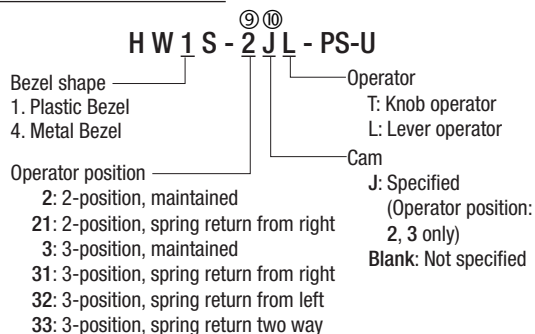

Operator position

Maintained (90° 2-position)	Spring Return (60° 2-position)
	
Cam code: blank	Cam code: J

Maintained (45° 3-position)	Spring Return (45° 3-position)		
			
Cam code: Blank, J	Cam code: blank		

Operator Unit

Quantity: 1

Key selector switch operator

Name / Shape	Plastic Bezel	Metal Bezel
	Part No.	
Disc tumbler 	HW1K-⑨⑩⑪-⑥-PS-U	HW4K-⑨⑩⑪-⑥-PS-U

• Specify a code in place of ⑨, ⑩, ⑪, and ⑥ the Part No.

Part number structure

⑨ ⑩ ⑪ HW 1 K - 2 J A - ⑥ - PS - U	
Bezel shape 1. Plastic Bezel 4. Metal Bezel	Key number Disc tumbler key Blank: Standard (231)
Operator position 2: 2-position, maintained 21: 2-position, spring return from right 3: 3-position, maintained 31: 3-position, spring return from right 32: 3-position, spring return from left 33: 3-position, spring return two way	Key removal position 2-position A: Removable in all positions B: Removable in the left only C: Removable in the right only
Cam J: Specified (Operator position: 2, 3 only) Blank: Not specified	3-position A: Removable in all positions B: Removable in the left and center C: Removable in the right and center D: Removable in center only E: Removable in right and left G: Removable in left only H: Removable in right only

Operator position code

Maintained (90° 2-position)	Spring Return (60° 2-position)
 Cam code: blank	 Cam code: J

Maintained (45° 3-position)	Spring Return (45° 3-position)		
 Cam code: Blank, J	 Cam code: blank	 Cam code: blank	 Cam code: blank

Key removal position

90° 2-position / 60° 2-position

Key Retained Position (Cam code: blank)		
A: Key removable in all positions 	B: Key removable at left 	C: Key removable at right 
Key Retained Position (Cam code: J)		
A: Key removable in all positions 	B: Key removable at left 	C: Key removable at right 

45° 3-position

Key Retained Position			
A: Key removable in all positions 	B: Key removable at left / center 	C: Key removable at center / right 	D: Key removable at center 
E: Key removable at right / left 	G: Key removable at left 	H: Key removable at right 	

①①② : Key removal position ①①② : Key retained position
Note: The key cannot be removed in a spring return position.

Operator Unit


Quantity: 1

Illuminated selector switch operator

Name / Shape	Plastic Bezel	Metal Bezel
	Part No.	
Knob 	HW1F-③④-PS-U	HW4F-③④-PS-U
Lever 	HW1F-③L④-PS-U	HW4F-③L④-PS-U

• Specify a code in place of ③ and ④ in the Part No.

Part number structure

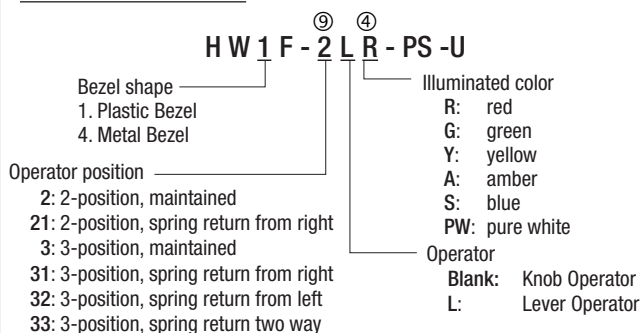


Selector pushbutton switch operator

Shape	Part No.
	HW1R-2A③-PS-U
	HW1R-2D③-PS-U
	HW1R-2E③-PS-U
	HW1R-2F③-PS-U
	HW1R-2N③-PS-U
	HW1R-2T③-PS-U

• Specify a code in place of ③ in the Part No.


Part number structure

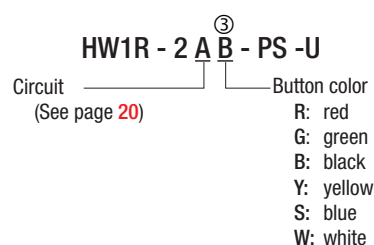

Monolever switch operator

Name / Shape	Part No.
HW1M Standard 	HW1M-1010-PS-U
	HW1M-2020-PS-U
	HW1M-0101-PS-U
	HW1M-0202-PS-U
	HW1M-1111-PS-U
	HW1M-2222-PS-U
HW1M-L Interlocking 	HW1M-L1010-PS-U
	HW1M-L2020-PS-U
	HW1M-L0101-PS-U
	HW1M-L0202-PS-U
	HW1M-L1111-PS-U
	HW1M-L2222-PS-U

Part number structure

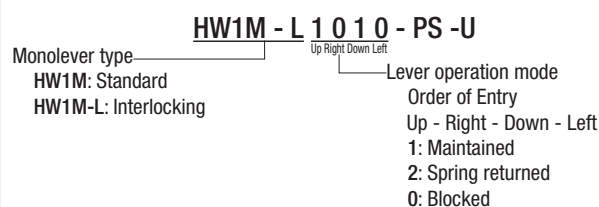

Operator Unit

Quantity: 1

Non-Illuminated E-Stop Pushbutton switch operator

Pushlock Turn Reset

Name / Shape	Part No.	
	Plastic	Metal
ø29mm Head Pushlock Turn Reset 	HW1B-V3④-PS-U	HW4B-V3④-PS-U
ø40mm Head Pushlock Turn Reset 	HW1B-V4④-PS-U	HW4B-V4④-PS-U
ø60mm Head Pushlock Turn Reset* 	HW1B-V5R-PS-U	—

Part number structure

HW1B - V 3 R - PS -U
 Bezel shape _____
 1: Plastic Round
 4: Metal Round
 Operation _____
 V: Pushlock Turn Reset
 Y: Push Pull
 Button type _____
 3: ø29mm Mushroom (pushlock turn reset)
 4: ø40mm Mushroom (pushlock turn reset)
 5: ø60mm Mushroom (pushlock turn reset)
 2: ø40mm Mushroom (push pull)

Note: The ø60mm mushroom can only be used with "1:Plastic Round(Bezel)".

Push Pull

Name / Shape	Part No.	
	Plastic	Metal
ø40mm Head Push-Pull 	HW1B-Y2④-PS-U	HW4B-Y2④-PS-U

Head EMO Pushlock Turn Reset

Name / Shape	Part No.	
	Plastic	Metal
ø40mm Head EMO Pushlock Turn Reset* 	HW1B-V4R-EMO-2-PS-U	HW4B-V4R-EMO-2-PS-U

Pushlock Key Reset

Name / Shape	Part No.	
	Plastic	Metal
ø40mm Head Pushlock Key Reset* 	HW1B-X4R-PS-U	HW4B-X4R-PS-U


- Specify the button color code in place of ④ in the Part No.
- *Available in red only.
- All E-Stop buttons are not removable.

Note: Determine mounting centers to ensure proper spacing.

Contact Unit / Contact Unit with Full Voltage Adapter


Contact Unit (illuminated) Part No. / Contact Configuration

Quantity: 1

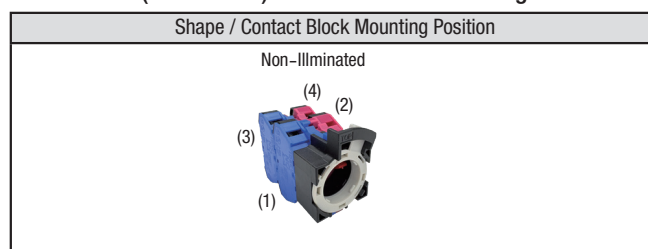

Contact Configuration (Code)	Part No.	Mounting Position	Contact
1NO (10)	HW-CNF10	(1)	NO
		(2)	Dummy
1NC (01)	HW-CNF01	(1)	NC
		(2)	Dummy
1NO-1NC (11)	HW-CNF11	(1)	NO
		(2)	NC
2NO (20)	HW-CNF20	(1)	NO
		(2)	NO
2NC (02)	HW-CNF02	(1)	NC
		(2)	NC
2NO-2NC (22)	HW-CNF22	(1)	NO
		(2)	NO
		(3)	NC
		(4)	NC
4NO (40)	HW-CNF40	(1)	NO
		(2)	NO
		(3)	NO
		(4)	NO
4NC (04)	HW-CNF04	(1)	NC
		(2)	NC
		(3)	NC
		(4)	NC

Note) Gold contact option is available. Add suffix "MAU" to end of part number.
For example, HW-CNF20 becomes HW-CNF20-MAU.

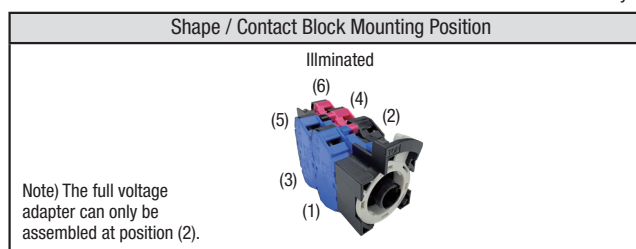

Contact Configuration (Code)	Part No.	Mounting Position	Contact
1NO (10)	HW-CNF10Q0	(1)	NO
		(2)	Full voltage adapter
1NC (01)	HW-CNF01Q0	(1)	NC
		(2)	Full voltage adapter
1NO-1NC (11)	HW-CNF11Q0	(1)	NO
		(2)	Full voltage adapter
		(3)	Dummy
		(4)	NC
2NO (20)	HW-CNF20Q0	(1)	NO
		(2)	Full voltage adapter
		(3)	Dummy
		(4)	NO
2NC (02)	HW-CNF02Q0	(1)	NC
		(2)	Full voltage adapter
		(3)	Dummy
		(4)	NC
2NO-2NC (22)	HW-CNF22Q0	(1)	NO
		(2)	Full voltage adapter
		(3)	NO
		(4)	NC
		(5)	Dummy
		(6)	NC
4NO (40)	HW-CNF40Q0	(1)	NO
		(2)	Full voltage adapter
		(3)	NO
		(4)	NO
		(5)	Dummy
		(6)	NO
4NC (04)	HW-CNF04Q0	(1)	NC
		(2)	Full voltage adapter
		(3)	NC
		(4)	NC
		(5)	Dummy
		(6)	NC

Note) LED lamp is not installed. When ordering a contact unit (illuminated), select a LED lamp from the options listed on page 39.

ø22 HW Series

Accessories and Maintenance Parts



$\varnothing 22$ HW Series Accessories and Maintenance Parts

Nameplates

All dimensions in mm

	Description	Material	Part No.	Quantity	Dimensions (mm)
	Legend				
HWAM	Order marking plate (round) separately.	Plastic (black)	HWAM	10	HWNP-□ marking plate (sold separately) is necessary.
HWAQ	Order marking plate (square) separately.	Plastic (black)	HWAQ	10	HWNP-□ marking plate (sold separately) is necessary.
HWAS	Blank	Plastic (black)	HWAS-0	10	

- Nameplates cannot be used on HW series control stations (HW1X).

Marking Plates for HWAM/HWAQ








Description	Material	Part No.	Quantity	Dimensions (mm)
HWNP	Aluminum (black) Thickness = 1.0mm	HWNP-□	10	White legend on black background. Engraving area: W25×H7

- Specify a legend code in place of □ in the Part No.

Legends



Code	Legend
0	(blank)
1	ON
2	OFF
3	START
4	STOP
31	OFF-ON
35	HAND-AUTO
53	HAND-OFF-AUTO


- See page 45 on how to install nameplates/markings plates, and on how to remove marking plates.

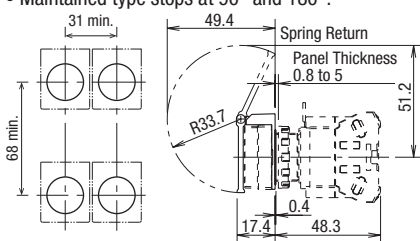Accessories				All dimensions in mm	
Name / Shape		Material	Part No.	Quantity	Remarks
Tool	Locking Ring Wrench	Metal (brass) Weight: approx. 150g	MW9Z-T1	1	Used to tighten the locking ring when installing the HW switch onto a panel. 
	Lamp Holder Tool	Nitrile rubber (black)	OR-55	1	- Used to install and remove the LED lamps. See page 42 for how to install. Ⓐ : BA9S 
Anti-rotation Ring		Ring: polyamide Gasket: nitril rubber	HW9Z-RL	10	Used to prevent the operator from turning. Generally used when using no nameplates on selector switches and pushbutton selectors. 
Rubber Mounting Hole Plug		Nitril rubber (black)	OB-31	5	Degree of protection: IP65 (round hole), IP40 (with anti-rotation function) 
Mounting Hole Plug		Plug: Metal (Zinc diecast) Locking nut: Polyamide Gasket: Nitrile rubber	LW9Z-BM	1	- Degree of protection: IP66 (round hole), IP40 (with anti-rotation function) - Tightening torque: 1.2 N·m 
Mounting Hole Plug		Polyamide	LW9Z-BP1	1	- Degree of protection: IP65 - Tightening torque: 2.0 N·m 
Switch Guard	Spring Return	Guard: Polyacetal Cover: polyarylate	HW9Z-K1	1	- Used to prevent inadvertent operation for flush pushbuttons. Degree of protection: IP65 - Maintained type stops at 90° and 180°. 
	Maintained	Gasket: Nitrile rubber	HW9Z-K11	1	
Button Clear Boot	For flush pushbuttons	Rubber (EPDM)	OC-31	1	- Used to cover and protect pushbuttons where units are subject to water splash. Not suitable for outdoor use or where the units are subject to oil splash. - Cannot be used with nameplates HWAM, HWAQ, HWAS, or HWAV. 
	For extended pushbuttons		OC-32	1	

Accessories


All dimensions in mm

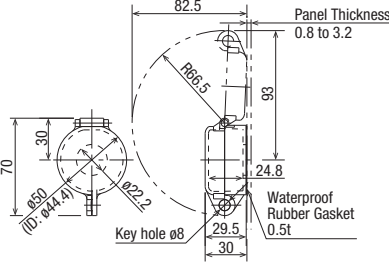
Name / Shape	Material	Part No.	Quantity	Remarks
Padlock Cover 	Polyarylate Gasket: Nitrile rubber	HW9Z-KL1	1	Used to protect pushbuttons, selector switches, and key selector switches. 
Rubber Boot for Dual Pushbutton Switches 	Clear Silicon Rubber	HW9Z-D7D	1	IP65 
Ring Adapter 	Nitril rubber	HW9Z-A25	5	- Used to install the HW series units into $\varnothing 25$ mm mounting holes. Degree of protection: IP65 - Cannot be used with anti-rotation and nameplate. - Mounting panel thickness: 1.2 to 6.0 mm - See page 44 for details.
Ring Adapter 	Gasket: polyamide Washer: metal (brass)	HW9Z-A30	2	- Used to install the HW series units (round type) into $\varnothing 30$ mm mounting holes (except HW1P-5, HW1B-M5/V5, HW7D). Degree of protection: IP65 - Cannot be used with anti-rotation ring and nameplate. Cannot be used on full shroud illuminated pushbuttons, selector pushbuttons, and mono-lever switches. - Mounting panel thickness: 1.6 to 4.0 mm

Maintenance Parts				
Name / Shape	Material	Part No.	Quantity	Remarks
Contact blocks (without side entry) 	NO contact Housing color: blue Holder color: green	HW-U10-F	1	These contacts are applicable for wires terminated by ring, fork, or ferule terminals, and also bare wire connections.
		HW-U10-F-MAU	1	
	NC contact Housing color: reddish purple Holder color: red	HW-U01-F	1	
		HW-U01-F-MAU	1	
	NO contact (early make) Housing color: blue Holder color: black	HW-U10R-F	1	
		HW-U10R-F-MAU	1	
	NC contact (late break) Housing color: reddish purple Holder color: white	HW-U01R-F	1	
		HW-U01R-F-MAU	1	
Contact blocks (with side entry) 	NO contact Housing color: blue Holder color: green	HW-U10	1	These contacts are applicable for wires terminated by ring, fork, terminals, not recommended for bare wire connections.
		HW-U10-MAU	1	
	NC contact Housing color: reddish purple Holder color: red	HW-U01	1	
		HW-U01-MAU	1	
	NO contact (early make) Housing color: blue Holder color: black	HW-U10R	1	
		HW-U10R-MAU	1	
	NC contact (late break) Housing color: reddish purple Holder color: white	HW-U01R	1	
		HW-U01R-MAU	1	
Dummy Block 	Polyamide (black)	HW-DB	10	Non-Illumination switches with 1 or 3contact blocks contain 1 dummy block. Illumination switches with 2 or 4contact blocks contain 1 dummy block.
Full voltage adapter (without side entry) HW-UA1-FH 		HW-UA1-FH	1	Applicable model: Illuminated pushbuttons Illuminated selector switches Dual pushbutton (with pilot light) Applicable load (LED lamp) LSRD-6 (6V AC/DC) LSRD-1 (12V AC/DC) LSRD-2 (24V AC/DC) LSRD-H2 (100/120V AC/DC) LSRD-M2 (200/220V AC) LSRD-M4 (230/240V AC)
Connecting unit 	Weight: approx. 9g	HW-CN	1	Connecting unit for Screw type terminal

Maintenance Parts


All dimensions in mm

Name / Shape		Material/Dimensions	Part No.	Quantity	Color Code *
Lens 	①Round flush	Polyarylate ø23.5 H4.2	HW9Z-L11*-K	5	R (red), G (green), Y (yellow), A (amber), C (clear), S (blue)
	②Square flush	Polyarylate ø24.6 H4	HW9Z-L21*-K	5	
	③Round extended	Polyarylate ø23.3 H10	HW9Z-L12*-K	5	
	④ø29 mushroom	AS, marking type ø29 H12.7	ALW31LD*-K	2	
	⑤ø40 mushroom	AS, marking type ø40 H12.7	ALW41LD*-K	1	
	⑥Dome for pilot light	AS ø23.5 H15.1	HW1A-P2*-K	5	R (red), G (green), Y (yellow), A (amber), W (white), S (blue)
Replacement Jumbo Dome Lens 		Polycarbonate Replacement Lens (If using yellow lens, use white LED.	HW1A-P5① ① = (A, G, R, S, W, Y))		
Replacement Jumbo LED Diffusing Lens 			HW9Z-PP5C		
Button 	①Round flush with round or square bezel	Polyacetal ø23.6 H3	HW1A-B1*	5	• Use ① for Selector pushbuttons B (black), G (green), R (red), Y (yellow), S (blue), W (white)
	②Round extended with round or square bezel	Polyacetal ø23.6 H9.2	HW1A-B2*	5	
	③Square flush	Polyacetal □24.8 H3	HW2A-B1*	5	
	④Square extended	Polyacetal □24.5 H9.2	HW2A-B2*	5	
	⑤ø29 mushroom	Polyacetal ø29 H12.7 (M18P1.0)	HW1A-B3*	2	
	⑥ø40 mushroom	Polyacetal ø40 H12.7 (M18P1.0)	HW1A-B4*	2	
Marking Plate	Round flush 	Acrylic ø21.5 Thickness = 1	HW9Z-P11	5	• White • See page 45 for dimensions and engraving area.
	Round extended 	Acrylic ø21.3 Thickness = 6.5	HW9Z-P12	5	
	Square flush 	Acrylic 22.7 Thickness = 1	HW9Z-P21	5	
	ø29/40 mm mushroom 	Acrylic ø15.7 H3.4	ALW3B	5	
Operator Knob for Illuminated Selector Switch 		AS resin	HW9Z-FDY*-K	1	R (red), G (green), Y (yellow), A (amber), W (white), S (blue)
Operator Lever for Illuminated Selector Switch 			HW9Z-FDL-K	1	
Spare Key (Disc Tumbler Key) 		Metal (nickel-plated brass)	HW9Z-SK-231	2	

Maintenance Parts					All dimensions in mm
Name / Shape		Material/Dimensions	Part No.	Quantity	Remarks
Locking Ring 		Polyamide (black) ø28.4 H5 M22P1	HW9Z-LN	5	
Cap for Mono-lever Switch 	Standard	Nitril rubber ø10 L20	HW9Z-CPM	1	
Boot for Mono-lever Switch 	Standard	Nitril rubber ø29.2 L34.4	HW9Z-BLM	1	
Gasket 		Nitril rubber (black)	HW9Z-WM	10	Thickness = 0.5 
Barrier for Dual Pushbuttons 		Plastic barrier. Used when mounting the HW7 units on 30mm horizontal centers, to prevent possible interconnections between adjoining terminals.	HW-VU1		

- Only one color is available for LSRD so there are no codes to specify the color in the part no.
- Also available for purchase individually. Standard pricing differs in this case.
- Use a LSRD-2 lamp for dome pilot lights with Y (yellow), S (blue), or PW (pure white) illumination
- When replacing the LED lamp, please check the part no. and voltage of the product currently in use.

HW Series LED Lamps

Shape/Dimensions	Operating Voltage	Current Draw		Part No.	Quantity	Base
		DC	AC			
 	6V AC/DC	10mA	14mA	LSRD-6	10	BA9S/13
	12V AC/DC	7mA	8mA	LSRD-1	10	
	24V AC/DC	7mA	8mA	LSRD-2	10	
	100/120V AC/DC	2mA	2mA	LSRD-H2	10	
	200/220V AC	—	2mA	LSRD-M2	10	
	230/240V AC	—	2mA	LSRD-M4	10	

Accessory for green dual pushbutton (with pilot light)


Quantity: 5

Shape	Part No.	Dimensions
Attachment lens 	LSRD-L*	• For PW (pure white) illumination, use only a LSRD lamp and not an attachment lens. • The attachment lens is available with 5 pieces connected as shown on the right. • Color Code *: R (red), G (green), A (amber), S (blue) 

- See page 46 for the installation method.

For HW Jumbo Dome Pilot Lights

Quantity: 1

Shape	Operating Voltage	Current Draw		Part No.	Dimensions
		DC	AC		
	24V AC/DC	A: 14mA	A: 14mA	LSTDB-2AN	
		G: 8mA	G: 8mA	LSTDB-2GN	

- Use an A (amber) LED for (R) red illumination.
- Use a LSRD-2 lamp for dome pilot lights with Y (yellow), S (blue), or PW (pure white) illumination.

Accessories


Shape	Operating Voltage	Operating Voltage Range	Part No.	Applicable Load
6V 	400/440V AC	400/440V AC $\pm 10\%$	TWR546	LSRD-6 (6V AC/DC, LED lamp)
24V 	400/440V AC	400/440V AC $\pm 10\%$	TWR542	LSRD-2 (24V AC/DC, LED lamp)

- Terminal cover (TWR-VL3) is installed on transformers as standard.
- Transformer is installed to one HW series unit.

Specifications



Part No.	TWR5□6	TWR5□2
Operating Voltage	400/440V AC (50/60Hz)	
Current Draw	2.4VA	
Rated Insulation Voltage	600V	
Insulation Resistance	100M Ω minimum (500V DC megger)	
Operating Temperature	-30 to +60°C (no freezing)	
Operating Humidity	35 to 85% RH (no condensation)	
Storage Temperature	-40 to +80°C (no freezing)	
Vibration Resistance	Damage limits: 30Hz, amplitude 1.5 mm Operating extremes: 5 to 55Hz, amplitude 0.5 mm	
Shock Resistance	Damage limits: 1,000 m/s ² Operating extremes: 100 m/s ²	
Dielectric Strength	2500V AC, 1 minute	
Terminal Screw	M3.5	
Applicable Wire	2mm ² maximum, 2 wires maximum	
Weight (approx.)	87g	

Dimensions

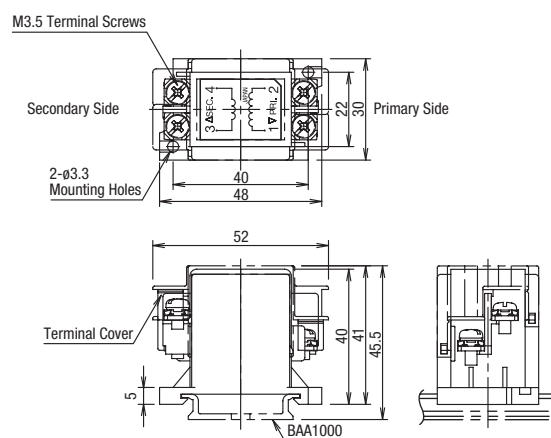

All dimensions in mm.

Accessories

Shape	Material	Part No.	Quantity	Dimensions (mm)
DIN 35 mm Rail  Weight: 200g approx.	Aluminum Length: 1000 mm	BAA1000	10	
End Clip  Weight: 15g approx.	Metal (zinc-plated steel) Applicable rail: BAA1000 BAP1000	BNL6	10	

ø22 HW Series Instructions


Safety Precautions

- Turn off the power to the HW series switches & pilot lights before starting installation, removal, wiring, maintenance, and inspection of the products. Failure to turn power off may cause electrical shocks or fire hazard.
- To avoid a burn on your hand, use the lamp holder tool when replacing lamps.
- For wiring, use wires of a proper size to meet the voltage, current requirements, and the number of connectable wires (page 47). Failure to tighten the terminal screws may cause overheating and fire.
- Avoid using in places mentioned below to maintain performance of the product.
 - Exposed to direct sunlight
 - Subject to corrosive or flammable gases

Instructions

Panel Mounting

1. Remove the contact block from the operator.
2. Remove the locking ring from the operator.
3. Insert the operator into the panel cut-out from the front.
When mounting the nameplate, insert between the operator and panel.
4. Tighten the locking ring from the back.

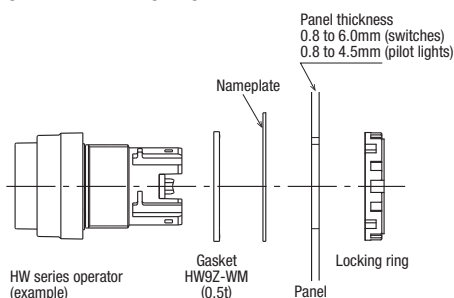

Mounting panel thickness is reduced by 1.5 mm when using a nameplate.

Notes for Panel Mounting

Locking ring wrench recommended torque
Tighten the bezel to a tightening torque of 2.0 N·m.

Locking ring wrench (MW9Z-T1) can be used to tighten the bezel. Do not use pliers. Excessive tightening will damage the locking ring.




Locking ring wrench (MW9Z-T1)

Panel Thickness

HW series can be mounted on a panel with thickness of 0.8 to 6.0 mm (switches) and 0.8 to 4.5 mm (pilot lights). Take the thickness of nameplate and/or switch guard into consideration.


Removing the Contact Block

1. Remove the operator from the contact block by pushing and turning the locking lever in the direction of the arrow shown below. Then the operator can be pulled out.
2. To reinstall, place the TOP marking on the operator and the lock lever in the same direction, and insert the operator into the contact block mounting adapter. Then turn the locking lever in the opposite direction.

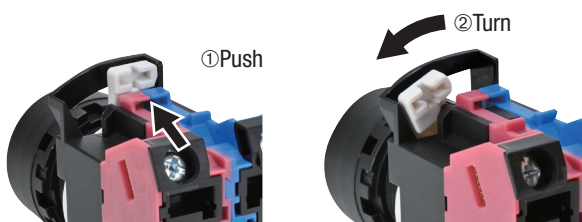

Anti-rotation Ring and Mounting Panel

Turn the TOP marking on the operator and the ▲ mark on the anti-rotation ring to the recess on the mounting panel.

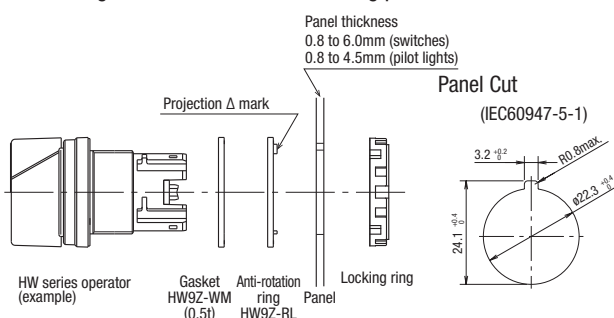

Instructions

Replacement of LED Lamps

LED lamps can be replaced by using the lamp holder tool (OR-55) from the front of the panel, or by removing the contact block from the operator unit. (See page 35 for lamp holder tool.)

How to Remove

To remove, slip the lamp holder tool onto the lamp head lightly. Then push slightly, and turn the lamp holder tool counterclockwise.






Photo: Extended pilot light

How to Install

Insert the lamp head into the lamp holder tool.



Place the pins on the lamp base to the grooves in the lamp socket. Insert the lamp and turn it clockwise.

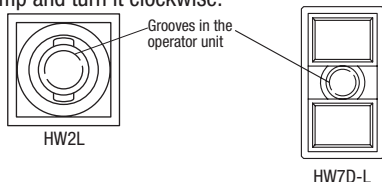

Installing/Removing the Buttons and Lenses

<To install>

<To remove>

Pushbutton Button

• Flush/Extended

Push in the button to install.



Insert a flat screwdriver between the button and the bezel to remove the button.



• Mushroom/Jumbo Mushroom

Button has threads. Turn clockwise to install the button.



Turn the button counterclockwise to remove.

Note: Jumbo mushroom button cannot be removed.



Illuminated Pushbutton Lens

• Flush/Extended

Push in the lens holder into the operator unit.



Insert a flat screwdriver between the button and the bezel to remove the lens holder.



• Mushroom/Jumbo Mushroom

Lens has threads. Turn clockwise to install the lens.



Lens has threads. Turn counterclockwise to remove the lens.



Pilot Light Lens

• Extended

Lens has threads. Turn clockwise to install the lens.



Turn the lens counterclockwise to remove.



• Round Flush/Square Flush

Push in the lens holder into the operator unit.



Insert a flat screwdriver between the lens and the bezel to remove.




Instructions

Installing/Removing the Lenses and Marking Plates

Removing


Removing the lens unit

Insert a flat screwdriver in groove of the lens (TOP mark side of the operator or opposite side) to remove the lens unit (lens/marketing plate/ lens holder).



Removing the lens

Remove the lens by pushing the lens from the rear to disengage the latches between the lens and the lens holder, using a flat screwdriver as shown below.




Note: The translucent filter in the lens holder cannot be removed because this filter is sealed to make the unit waterproof and oiltight.

Installing

1. Place the marking plate on the lens holder with the anti-rotation projection engaged and press the lens onto the lens holder to engage the latches.
2. Place the marking plate in the correct orientation.

For Square Lens (square flush lens)


*Note the orientation of the parts.



Lens Marking plate Lens holder

Removing the Contact Blocks

Insert a flat screwdriver (4 to 6 mm) into the snap-fit latch at the rear of the unit and gently lift to remove the contact block.




- Make sure to lift both latches. Contact blocks cannot be removed by lifting one latch only.
- Do not apply excessive force to the latches, otherwise damage may be caused.

Full Voltage Adapter

Attach or remove the full voltage adapter only after detaching the connection unit from the operating unit.

Insert a flat screwdriver (4 to 6 mm) into the quick-lock tab at the rear of the unit and lift to remove the full voltage adapter.

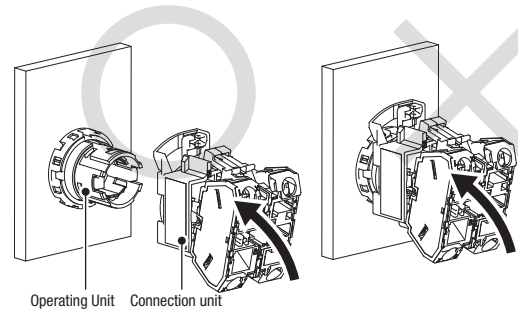


⚠ Caution When Replacing Units: When replacing parts (such as contact blocks, dummy blocks, or full voltage adapters) during maintenance, make sure to reinstall them in their original positions. Changes to the original configuration will void the warranty.

Instructions

Using a Ring Adapter


HW9Z-A25

Install the ring adapter between the HW series unit and panel. Make sure that the side with ridges face the panel.

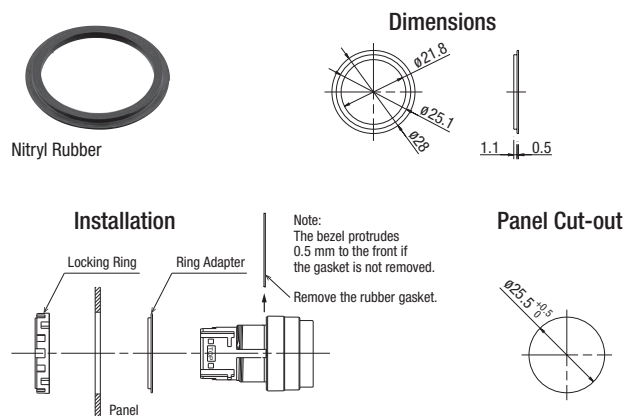


HW9Z-A30

The ring adapter HW9Z-A30 consists of a washer and adapter. Install adapter between the HW series unit and panel. Install washer between the locking ring and panel.

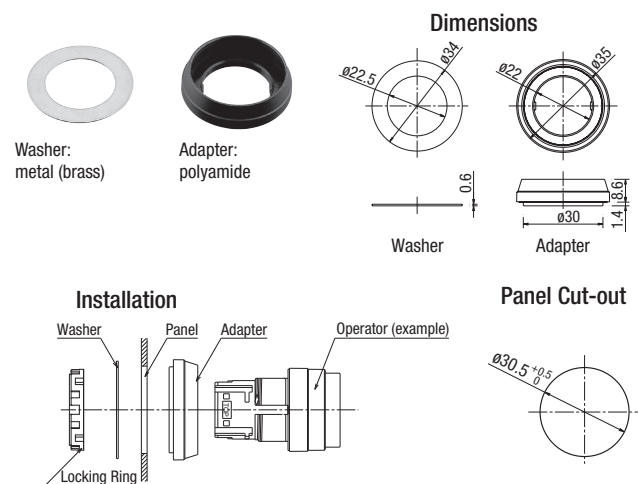

Dual Pushbutton Switches

The pushbuttons cannot be removed or replaced. Do not attempt to remove using a flat screwdriver or pincers, otherwise the pushbuttons may be damaged.




Installing the Rubber Boot for Dual Pushbuttons

When using the HW7D pushbuttons in places where the pushbuttons are subject to water splash or an excessive amount of dust, make sure to use the HW9Z-D7D rubber boot (IP65) which is ordered separately. Remove the rubber gasket pre-installed on the operator, and install the rubber boot from the front of the button.

Notes for Installing the Rubber Boot

Remove the gasket from the operator, and install the rubber boot on the operator. Pull out the seals of the rubber boot and place them around the operator sleeve as shown. Make sure that the seals are not twisted or tucked inside and that the gasket does not remain, otherwise the normal waterproof and dustproof characteristics are not ensured.

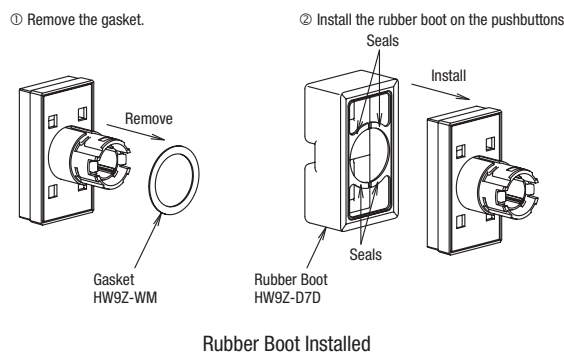

Selector Switches

Turn the operator such as knob, lever, and key to each position accurately. Releasing halfway may cause the operator to return to the former position, or to get stuck between. On spring return two-way types, the center of operators may be misaligned slightly.

Key Selector Switches





Observe the following instructions to prevent malfunction or damage.

- Turn the key securely to each position.
- Insert the key to the bottom of the key hole.
- Do not remove the key from any key retained position.
- Use a key that matches with the number on the key cylinder. However, for standard keys, the key number is engraved on the key but not on the key cylinder.

Instructions


Marking

For HW series illuminated pushbuttons and pilot lights, legends and symbols can be engraved on the built-in marking plates, or printed film can be inserted under the lens for labeling purposes. Films are not supplied with illuminated pushbuttons, and may be provided by the user.

Lens Style	Round Lens (Round Flush/Round Flush with Square Bezel)	Square Lens (Square Flush)
Built-in Marking Plate	 Outside diameter ø21.5	 Outside diameter □22.7
	- Engraving must be made on the engraving area within 0.5 mm deep. - The marking plate is made of white acrylic resin.	
Applicable Marking Film		
	- Two 0.1 mm-thick films or one 0.2 mm-thick film can be installed in the lens (marking film is not supplied and must be provided by the user). - Recommended marking film: polyester	


Insertion Order of Marking Plate and Film

[Round Lens]



Note: Films are not supplied.

[Square Lens]




Note: Films are not supplied. When inserting a film, make sure that the marking plate is installed with its uneven side facing the lens holder.

Nameplate

Mounting panel thickness is reduced by 1.5 mm when using a nameplate.


Installing a Marking Plate

Insert a marking plate in the direction of the arrow ①, and press in as shown ②.



Removing a Marking Plate


Insert a flat screwdriver into the upper middle part of the marking plate and remove. When anti-rotation is not required, remove the projection from the nameplate using pliers.



Instructions

Close Mounting

When mounting the units closely in a horizontal row on 30 mm centers, use optional barriers to prevent interconnection between adjoining terminals, and to increase the creepage distance. The barriers can be attached simply by pressing them onto the sides of contact blocks.

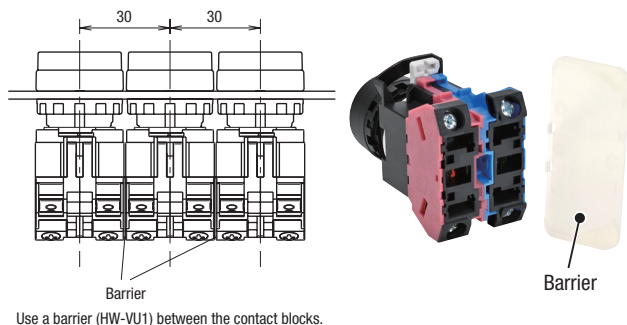


Note: Sufficient insulation distance cannot be obtained if barriers are not installed, or when other barriers such as HW-VG1 is used.

When using transformer type pilot lights closely mounted in horizontal and vertical rows on 30 mm centers, keep the ambient temperature below 40°C.

Installing the attachment lens

Install the lens on to the LED lamp with the lens remaining on the runner. (The lens will be cut off when installed). Note the front and back sides of the lens.

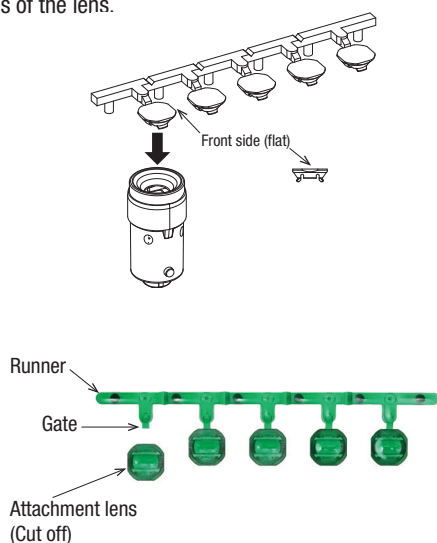

Applicable Wiring


(1) Contact Block 0.3 to 3.5 mm² (solid wire ø0.5 to 2.0 mm)

Pushbutton/illuminated pushbutton/dual pushbuttons (without pilot light), selector switch, illuminated selector switch, pushbutton selector, mono-lever switch

Ⓐ and Ⓑ show the wiring direction to the terminals.

<Contact Block>



Terminal screws M3.5 (spring-up)




Applicable Crimping Terminal

Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.


Crimping terminal for Ⓐ




IP20 crimping terminal



Crimping terminal for Ⓑ (IP20)



Solid wire



- Strip the wire insulation 8 to 9 mm from the end.
- Insert the wire until the insulation comes into contact with the terminal metal part.

Instructions


(2) Full Voltage Adapter 0.3 to 3.5 mm² (solid wire ø0.5 to 2.0 mm)

Illuminated pushbutton, illuminated selector switch, dual pushbuttons with pilot light

(A) and (B) show the wiring direction to the terminals.

<Full Voltage Adapter>


Terminal screws M3.5 (spring-up)




Applicable Crimping Terminal

Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.


Crimping terminal for (A)

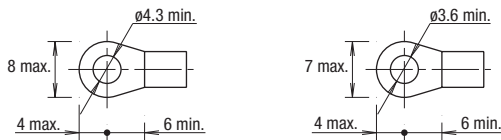


IP20 crimping terminal



Crimping terminal for (B) (IP20)



Solid wire



- Strip the wire insulation 8 to 9 mm from the end.
- Insert the wire until the insulation comes into contact with the terminal metal part.

(2)-1 IP20 Degree of Protection

The terminal of HW-U contact block and full voltage adapter has IP20 degree of protection. When IP20 is required for wiring, observe the followings.

Make sure to insert the crimping terminal or wire to the terminal straight and fully.

When using a crimping terminal

Use IP20 crimping terminals.

When using a solid wire

Strip the wire insulation 8 to 9 mm from the end and insert the wire to the terminal fully.

When using a stranded wire

Strip the wire insulation 8 to 9 mm from the end and insert the wire to the terminal fully. Make sure that the wires are not loosened.


(3) Pilot Light 0.3 to 2 mm² (solid wire ø0.5 to 1.6 mm)

(Arrows show the wiring direction)

<Full Voltage Adapter>

6 to 120V AC/DC, 200 to 240V AC


Terminal screws M3.5 (spring-up)



<Transformer>


380V AC minimum

Terminal screws M3.5 (spring-up)




Applicable Crimping Terminal

Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.



Solid Wire

- Strip the wire insulation 8 to 9 mm from the end.
- Inset the wire until the insulation comes into contact with the terminal metal part.
- Terminal cover is integrated but not IP20.
- When selecting mounting centers and crimping terminals, take sufficient insulation distance into consideration.



Recommended Tightening Torque Number of Wires

Unit	Wire	Number of Wires	Recommended Tightening Torque (N·m)	Terminal Screw
HW-U Contact Block	Crimping Terminal	2	1.0 to 1.3	M3.5
	Solid Wire	ø0.5 to 1.6 mm (AWG14 to 22)	2	
		ø1.7 to 2.0 mm (AWG12)	1	
	Stranded Wire	0.3 to 2.0 mm ² (AWG14 to 22)	2	
		2.1 to 3.5 mm ² (AWG12)	1	
Pilot Light	Crimping Terminal			M3.5
	Solid Wire	ø0.5 to 1.6 mm (AWG14 to 22)	2	
	Stranded Wire	0.3 to 2.0 mm ² (AWG14 to 22)		

*1) Lamp terminal of illuminated pushbuttons, illuminated selector switches, dual pushbuttons with pilot lights

Ordering Terms and Conditions

Thank you for using IDEC Products.

By purchasing products listed in our catalogs, datasheets, and the like (hereinafter referred to as "Catalogs") you agree to be bound by these terms and conditions. Please read and agree to the terms and conditions before placing your order.

1. Notes on contents of Catalogs

- (1) Rated values, performance values, and specification values of IDEC products listed in this Catalog are values acquired under respective conditions in independent testing, and do not guarantee values gained in combined conditions.
Also, durability varies depending on the usage environment and usage conditions.
- (2) Reference data and reference values listed in Catalogs are for reference purposes only, and do not guarantee that the product will always operate appropriately in that range.
- (3) The specifications / appearance and accessories of IDEC products listed in Catalogs are subject to change or termination of sales without notice, for improvement or other reasons.
- (4) The content of Catalogs is subject to change without notice.

2. Note on applications

- (1) If using IDEC products in combination with other products, confirm the applicable laws / regulations and standards.
Also, confirm that IDEC products are compatible with your systems, machines, devices, and the like by using under the actual conditions. IDEC shall bear no liability whatsoever regarding the compatibility with IDEC products.
- (2) The usage examples and application examples listed in Catalogs are for reference purposes only. Therefore, when introducing a product, confirm the performance and safety of the instruments, devices, and the like before use. Furthermore, regarding these examples, IDEC does not grant license to use IDEC products to you, and IDEC offers no warranties regarding the ownership of intellectual property rights or non-infringement upon the intellectual property rights of third parties.
- (3) When using IDEC products, be cautious when implementing the following.
 - i. Use of IDEC products with sufficient allowance for rating and performance
 - ii. Safety design, including redundant design and malfunction prevention design that prevents other danger and damage even in the event that an IDEC product fails
 - iii. Wiring and installation that ensures the IDEC product used in your system, machine, device, or the like can perform and function according to its specifications
- (4) Continuing to use an IDEC product even after the performance has deteriorated can result in abnormal heat, smoke, fires, and the like due to insulation deterioration or the like. Perform periodic maintenance for IDEC products and the systems, machines, devices, and the like in which they are used.
- (5) IDEC products are developed and manufactured as general-purpose products for general industrial products. They are not intended for use in the following applications, and in the event that you use an IDEC product for these applications, unless otherwise agreed upon between you and IDEC, IDEC shall provide no guarantees whatsoever regarding IDEC products.
 - i. Use in applications that require a high degree of safety, including nuclear power control equipment, transportation equipment (railroads / airplanes / ships / vehicles / vehicle instruments, etc.), equipment for use in outer space, elevating equipment, medical instruments, safety devices, or any other equipment, instruments, or the like that could endanger life or human health
 - ii. Use in applications that require a high degree of reliability, such as provision systems for gas / waterworks / electricity, etc., systems that operate continuously for 24 hours, and settlement systems
 - iii. Use in applications where the product may be handled or used deviating from the specifications or conditions / environment listed in the Catalogs, such as equipment used outdoors or applications in environments subject to chemical pollution or electromagnetic interference
If you would like to use IDEC products in the above applications, be sure to consult with an IDEC sales representative.

3. Inspections

We ask that you implement inspections for IDEC products you purchase without delay, as well as thoroughly keep in mind management/maintenance regarding handling of the product before and during the inspection.

4. Warranty

(1) Warranty period

The warranty period for IDEC products shall be one (1) year after purchase or delivery to the specified location. However, this shall not apply in cases where there is a different specification in the Catalogs or there is another agreement in place between you and IDEC.

(2) Warranty scope

Should a failure occur in an IDEC product during the above warranty period for reasons attributable to IDEC, then IDEC shall replace or repair that product, free of charge, at the purchase location / delivery location of the product, or an IDEC service base. However, failures caused by the following reasons shall be deemed outside the scope of this warranty.

- i. The product was handled or used deviating from the conditions / environment listed in the Catalogs
- ii. The failure was caused by reasons other than an IDEC product
- iii. Modification or repair was performed by a party other than IDEC
- iv. The failure was caused by a software program of a party other than IDEC
- v. The product was used outside of its original purpose
- vi. Replacement of maintenance parts, installation of accessories, or the like was not performed properly in accordance with the user's manual and Catalogs
- vii. The failure could not have been predicted with the scientific and technical standards at the time when the product was shipped from IDEC.
- viii. The failure was due to other causes not attributable to IDEC (including cases of force majeure such as natural disasters and other disasters)

Furthermore, the warranty described here refers to a warranty on the IDEC product as a unit, and damages induced by the failure of an IDEC product are excluded from this warranty.

5. Limitation of liability

The warranty listed in this Agreement is the full and complete warranty for IDEC products, and IDEC shall bear no liability whatsoever regarding special damages, indirect damages, incidental damages, or passive damages that occurred due to an IDEC product.

6. Service scope

The prices of IDEC products do not include the cost of services, such as dispatching technicians. Therefore, separate fees are required in the following cases.

- (1) Instructions for installation / adjustment and accompaniment at test operation (including creating application software and testing operation, etc.)
- (2) Maintenance inspections, adjustments, and repairs
- (3) Technical instructions and technical training
- (4) Product tests or inspections specified by you

The above content assumes transactions and usage within your region. Please consult with an IDEC sales representative regarding transactions and usage outside of your region. Also, IDEC provides no guarantees whatsoever regarding IDEC products sold outside your region.

IDEC CORPORATION

USA Office 2200 Faraday Ave Suite 200, Carlsbad, CA 92008

Japan Head Office
EMEA APEM SAS

Singapore IDEC Izumi Asia Pte. Ltd.
Thailand IDEC Asia (Thailand) Co., Ltd.
India IDEC Controls India Private Ltd.

China IDEC (Shanghai) Corporation
IDEC Hong Kong Co. Ltd.
Taiwan IDEC Taiwan Corporation

Japan IDEC Corporation

<https://www.idec.com/en-us>

Specifications and other descriptions in this brochure are subject to change without notice.
Information in this brochure is current as of July, 2026.

2026 IDEC Corporation, All Rights Reserved.

P1740a-0-HW-Screw

